





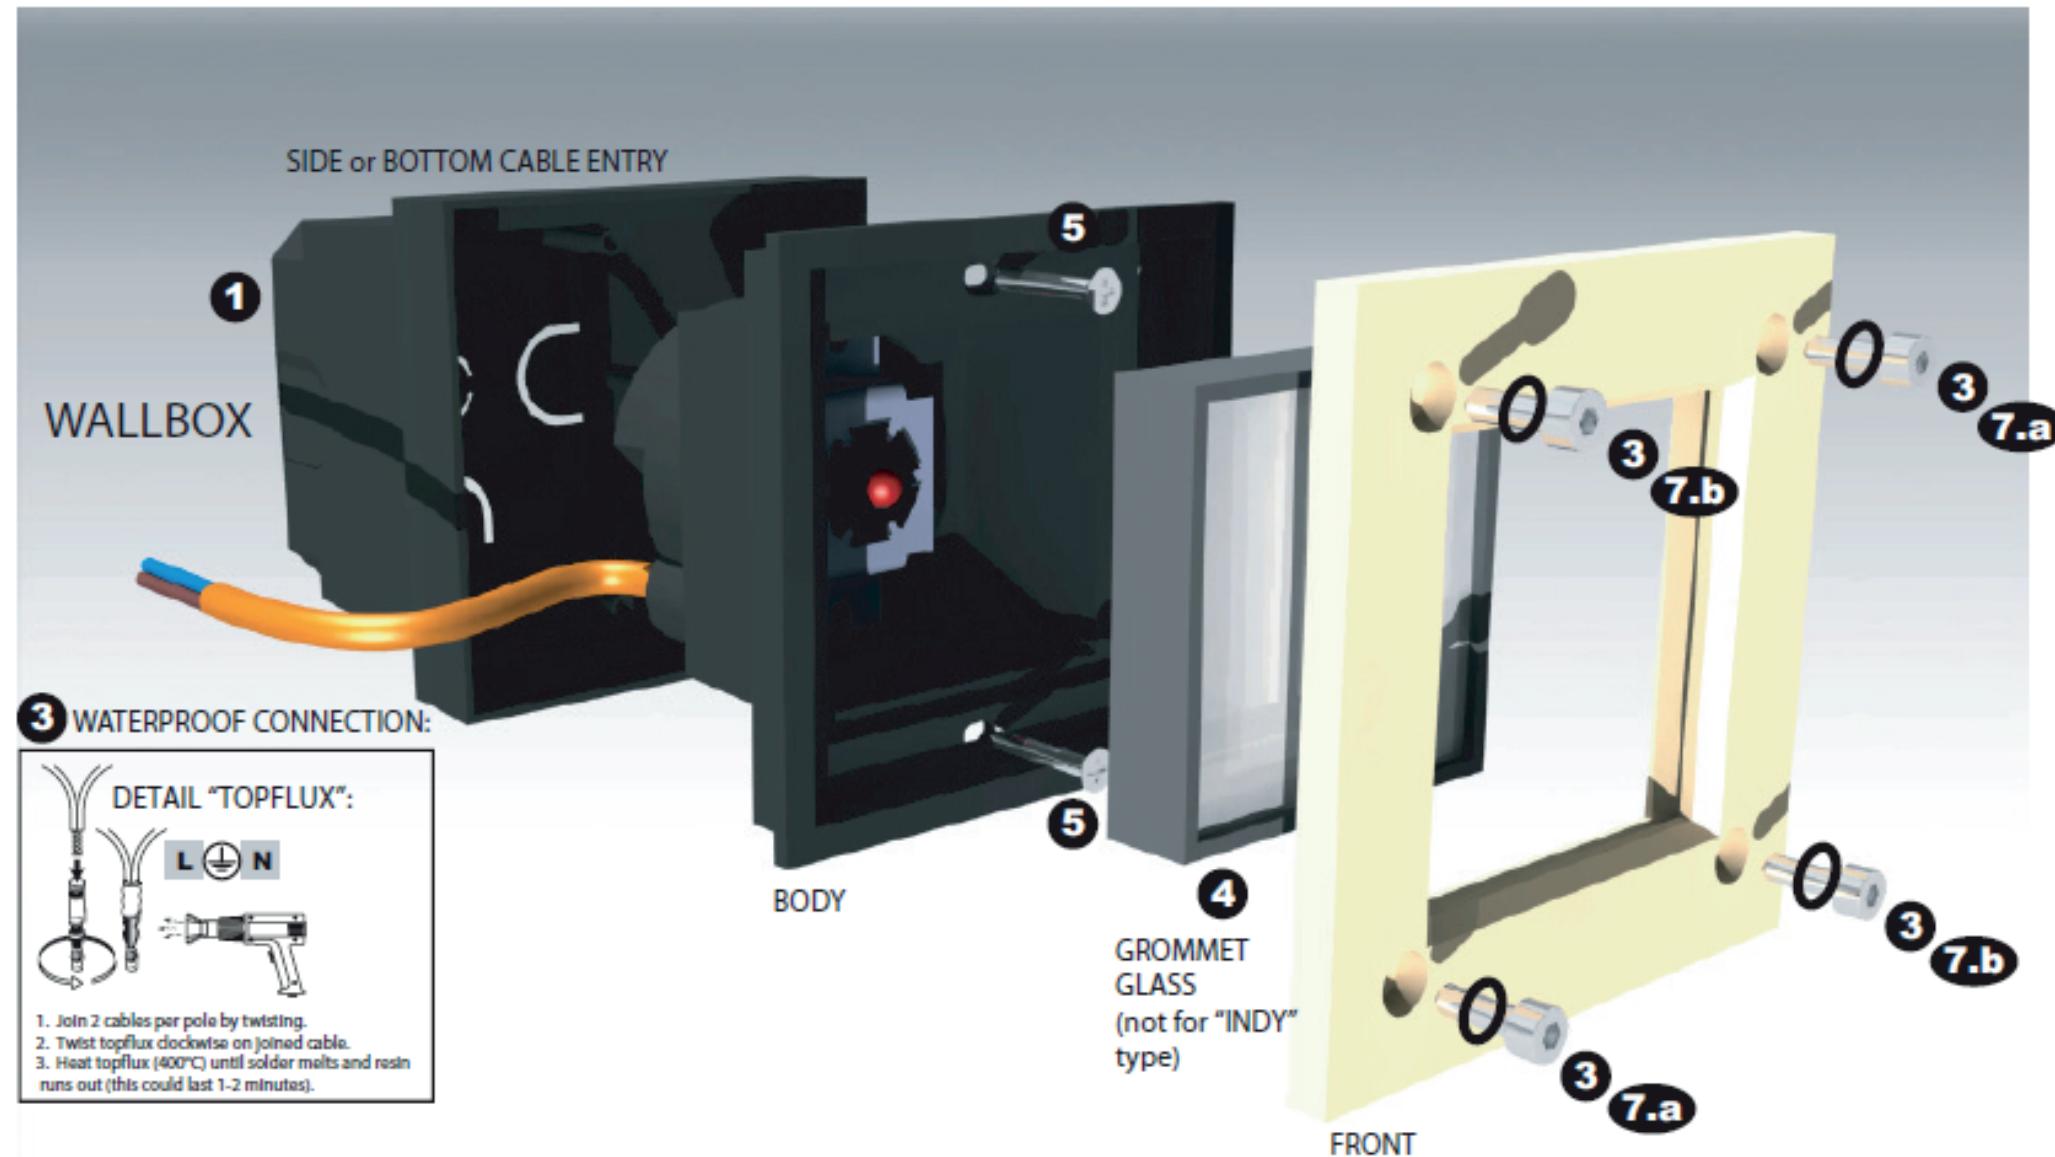
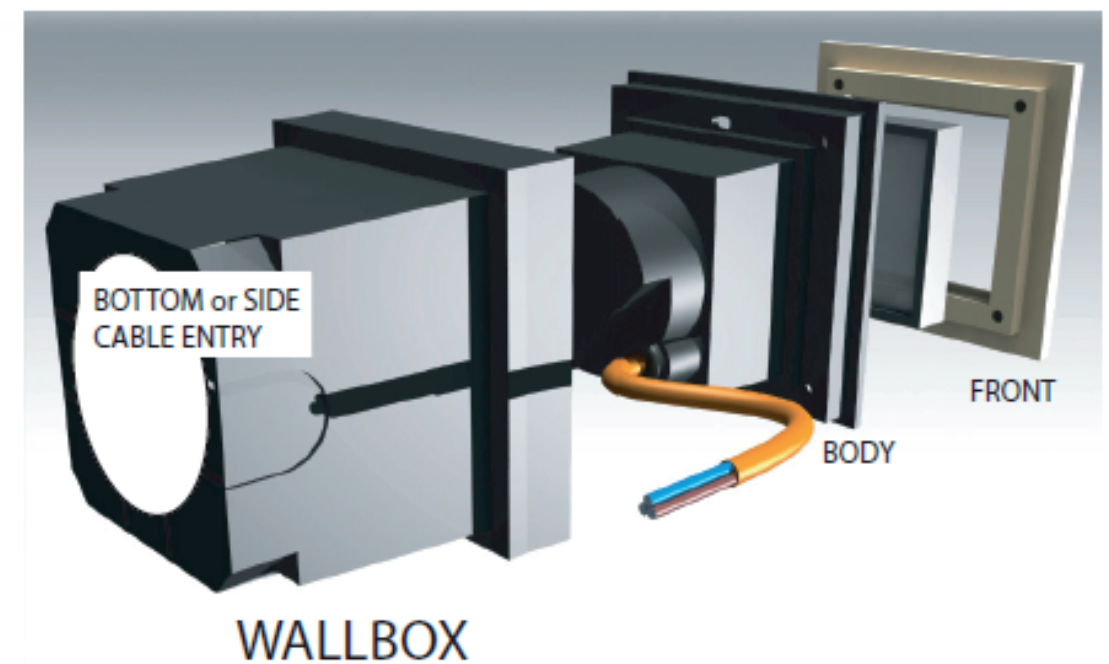


name	GREG SMALL IP65 230V			
ref	186024	GREG SQUARE	TEXT. GREY	2700K
	186083	GREG SQUARE	SILVER ANTHR.	2700K
	186086	GREG SQUARE	TEXT. BLACK	2700K
	186089	GREG SQUARE	SILVER SAND	2700K
	186034	GREG SQUARE	TEXT. GREY	3000K
	186093	GREG SQUARE	SILVER ANTHR.	3000K
	186096	GREG SQUARE	TEXT. BLACK	3000K
	186099	GREG SQUARE	SILVER SAND	3000K
	186053	GREG SQUARE	SILVER ANTHR.	6250K
	186056	GREG SQUARE	TEXT. BLACK	6250K
	186059	GREG SQUARE	SILVER SAND	6250K
	186033	GREG SQUARE	SILVER ANTHR.	AMBER
	186039	GREG SQUARE	SILVER SAND	AMBER
	186224	GREG SMALL	TEXT. GREY	2700K
	186283	GREG SMALL	SILVER ANTHR.	2700K
	186286	GREG SMALL	TEXT. BLACK	2700K
	186289	GREG SMALL	SILVER SAND	2700K
	186234	GREG SMALL	TEXT. GREY	3000K
	186293	GREG SMALL	SILVER ANTHR.	3000K
	186296	GREG SMALL	TEXT. BLACK	3000K
	186299	GREG SMALL	SILVER SAND	3000K
	186253	GREG SMALL	SILVER ANTHR.	6250K
	186256	GREG SMALL	TEXT. BLACK	6250K
	186259	GREG SMALL	SILVER SAND	6250K
	186233	GREG SMALL	SILVER ANTHR.	AMBER
	186239	GREG SMALL	SILVER SAND	AMBER
	186124	GREG LOUVRE	TEXT. GREY	2700K
	186183	GREG LOUVRE	SILVER ANTHR.	2700K
	186186	GREG LOUVRE	TEXT. BLACK	2700K
	186189	GREG LOUVRE	SILVER SAND	2700K
	186134	GREG LOUVRE	TEXT. GREY	3000K
	186193	GREG LOUVRE	SILVER ANTHR.	3000K
	186196	GREG LOUVRE	TEXT. BLACK	3000K
	186199	GREG LOUVRE	SILVER SAND	3000K
	186153	GREG LOUVRE	SILVER ANTHR.	6250K
	186156	GREG LOUVRE	TEXT. BLACK	6250K
	186159	GREG LOUVRE	SILVER SAND	6250K
	186133	GREG LOUVRE	SILVER ANTHR.	AMBER
	186139	GREG LOUVRE	SILVER SAND	AMBER
safe distance to object	 - 0,1m - 			
lamptype	PowerLED 1.2W			
fitting	NONE			
watt	1.2W			
current	230V AC			
symbol				
gear	Converter incorporated			
ip/class	IP65 			
application	Exterior - Interior 			
orientability	Wall mounted			
dimmability	Not dimmable			
weight	 0,8			



#### Mounting instructions:

- 1.install included wallbox (hole: 93x93 depth 90mm)  
+break cable side or bottom cable entry of wallbox  
to guide mains powersupply into wallbox  
Installation of wallbox can be done by glueing, plastering  
or cementing.
- 2.connect GREG's cable to mains power supply  
using 3x topflux (see topflux note)
- 3.unscrew front (4screws) of GREG
- 4.pull out front, gommnet (and glass)
- 5.fix GREG body onto wallbox using 2 included screws
- 6.switch mains powersupply "ON" and leave illuminated for  
10minutes to heat up the components.
- 7.switch mains powersupply "OFF" and reinstall front,  
gommnet (and glass) by screwing opposite corners first.  
to assure watertightness of luminaire.  
(Switch mains power supply back "ON")



ALWAYS DISCONNECT MAINS POWER SUPPLY  
FROM CONVERTER BEFORE SWITCHING "ON"  
LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES

INSTALLATION AND MAINTENANCE INSTRUCTIONS IN VIEW OF THE MANUFACTURER'S GUARANTEE.

1. THE CONNECTION AND TESTING OF THE DEVICES SHOULD ALWAYS BE PERFORMED BY A RECOGNIZED ELECTRICIAN.
2. THESE LIGHTING DEVICES NEED TO BE INSTALLED, CONNECTED AND TESTED FOLLOWING THE OFFICIAL NATIONAL INSTRUCTION GUIDE FOR ELECTRICAL INSTALLATIONS (BELGIUM, A.R.E.I., GERMANY: DIN VDE 0100 TEIL 559 A2, ...; THIS ENUMERATION IS JUST AN INDICATION)
3. THIS TECHNICAL ENCLOSURE NEEDS TO BE ADDED TO THE GENERAL SALES CONDITION OF THE TAL N.V.
4. THE ELECTRO TECHNICIAN IS RESPONSABLE TO USE BALLASTS, TRANSFORMERS,...WHICH MEET THE VALID CE AND EMC RULES.
5. ALWAYS REPLACE THE LAMP (-S) WITH UTMOST CAUTIOUSNESS, THE LAMP (-S) IS (ARE) VERY FRAGILE.
6. ATTENTION: NEVER REPLACE THE LAMP WITH BARE HANDS, ALWAYS USE A CLOTH !