

EMERGENCY PACK MANUAL TESTING 50V-200V

Artikelnummer 0046602




PRO



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (Vf) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiNH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Technische activa

Afmetingen (mm)

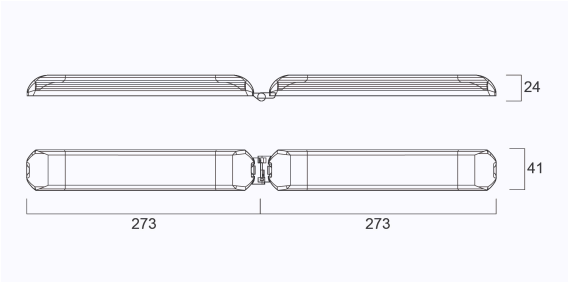

Fotometrie

EMERGENCY PACK MANUAL TESTING 50V-200V

Artikelnummer 0046602



General data

Productnaam	EMERGENCY PACK MANUAL TESTING 50V- 200V
Technologie	Toebehoren
Omgeving	Binnen
Algemene toepassing	Onderwijs, Horeca, Kantoor, Retail
ETIM klasse	EC000471
E-nummer FI	4279321
Garantie	1 jaar

Physical data

Gewicht (kg)	0.47
--------------	------

Packaging

EAN code	5410288466026
Enkele lengte verpakking (cm)	28.5
Enkele breedte verpakking (cm)	10.0
Hoogte eenheidsverpakking (cm)	4.5
DUN14 (inner)	05410288466026
Eenheden per binnendoos	1
Eenheden per omdoos	25
Lengte omdoos (cm)	46.0
Breedte omdoos (cm)	31.0
Diepte omdoos (cm)	30.0

Safety data

Uitsluitend te gebruiken in droge toepassingen	Ja
--	----