




# UP LED Lite

emergency



- IP65
- IP42
- IK07
- 850°
- Batt. LiFe
- +40°C / 0°C


-  Compact design with only 2 cm thickness.
-  Rest mode input available. Signe screen not included (to be ordered separately) for signal exit light whit visibility from 20 m.
-  Optical system with 4 opal lenses for a more diffuse illumination.

## Applications




Industry, retail, hospitals, schools, offices, residential

## Characteristics


- Power supply voltage** 230Vac ± 10%, 50Hz,
- Mounting** Wall, ceiling
- Recharging time** 12hrs
- Housing** Polycarbonate, white RAL 9003
- Optics** transparent Polycarbonate
- Screen** Clear polycarbonate
- Compliance** EN 60598-1, EN 60598-2-22, UNI EN 1838, EN 50172

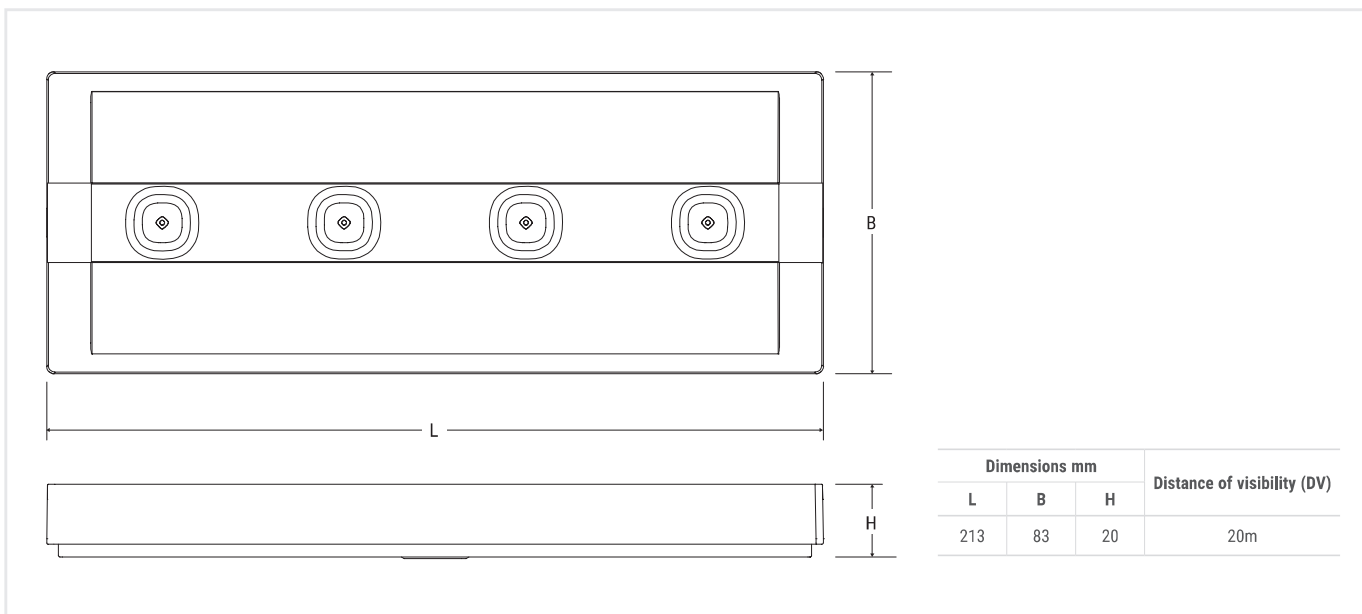

## Performance according to EN 1838


Height (m) 	Centre distance (m) ESCAPE ROUTES 		Illuminated surface area (m) LARGE AREAS 	
	Wall	Ceiling	Wall	Ceiling
2.5	5,5	-	4x6	-
3	-	9	-	7x7
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 4341 200 lm			Maintenance coefficient 0.8	

## UP LED Lite



	Order Code	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm	Input power		Weight Kg	Packaging Single/ Multi pack
								DC	AC		
TR	IP42										
	4353	UP LED LITE IP42 SE/SA RM LF	SA/SE	1/3	LiFe 3.2V 0.5Ah	200/100	-	2.3W	0.25	1/12	STANDARD
IP65											
	4354	UP LED LITE IP65 SE/SA RM LF	SA/SE	1/3	LiFe 3.2V 0.5Ah	200/100	-	2.3W	0.25	1/12	

## ACCESSORIES - included

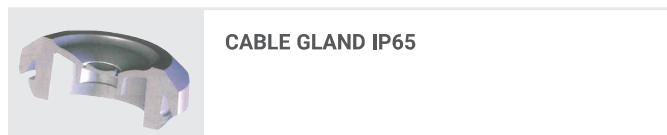

## ACCESSORIES - to be ordered separately

