


EAS EK FS 12 (775 626)

■ Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator

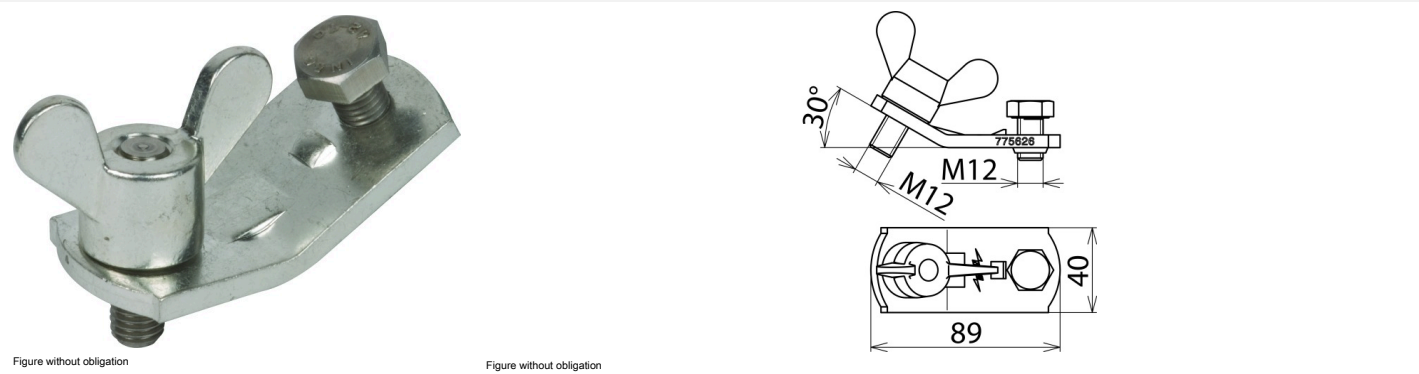

| Type | EAS EK FS 12 |
|---|---------------------------------|
| Part No. | 775 626 |
| Dimensions | M12 x 15 mm |
| Anti-rotation cable lug | PK1 |
| For cable cross-section Cu | 16 ... 150 mm² |
| Max. short-circuit current I _k 0.5 s | 42.0 kA |
| Max. short-circuit current I _k 1 s | 29.6 kA |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range | -25 °C ... +55 °C |
| Material (terminal lug) | E-Cu/gal Sn |
| Material (wing nut) | Cu alloy/gal Sn |
| Weight | 343 g |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364102569 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

The clamps must have the same maximum short-circuit current as the earthing and short-circuiting cables!