
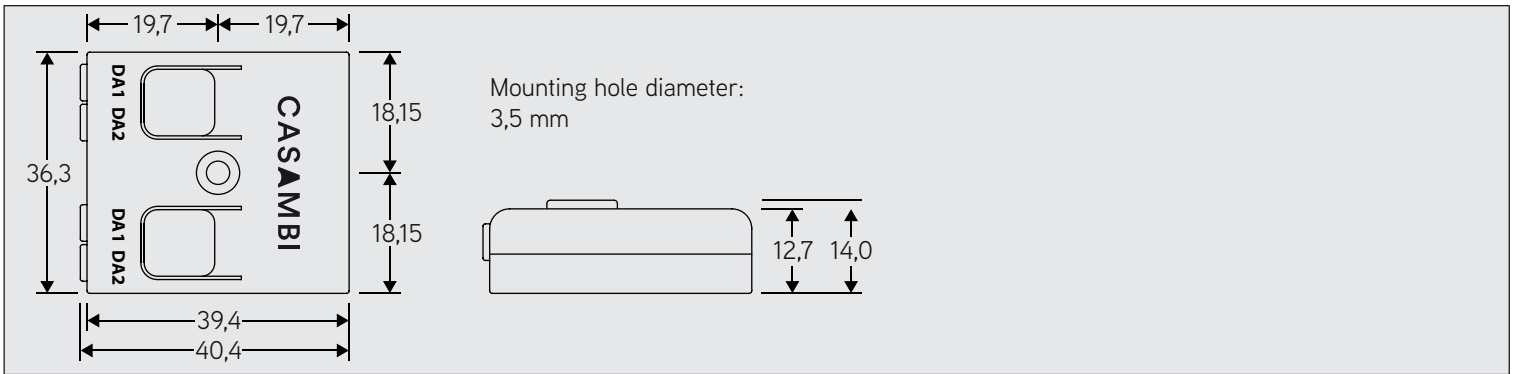


WIRELESS CONTROL DIM5 + DALI GATEWAY



DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A


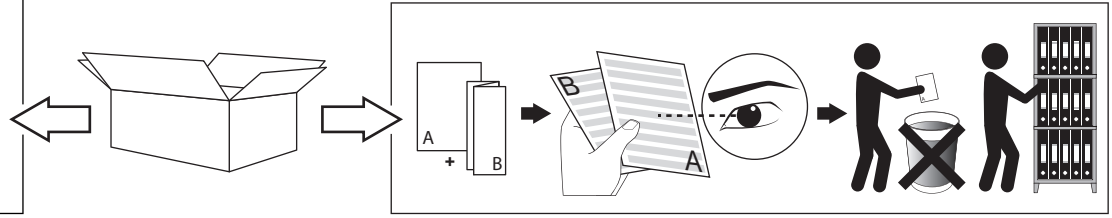


IP20
 Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm
 Protégé contre les objets solides de plus de 12 mm
 Geschützt gegen Festkörper größer als 12 mm
 Protected against solid objects greater than 12 mm
 Protegido contra objetos sólidos superiores a 12 mm
 Protetto contro oggetti solidi più grandi di 12 mm

III
 Enkel geschikt voor toestellen op zeer lage veiligheidsspanning (minder dan 50 V-AC / 120 V-DC)
 Convient uniquement pour les produits à très basse tension de sécurité (moins de 50 V-AC / 120 V-DC)
 Geeignet für Güter mit sehr niedriger Sicherheitsspannung (unter 50 V-AC / 120 V-DC)
 Only suited for goods at Safety Extra Low Voltage (below 50 V-AC / 120 V-DC)
 se recomienda únicamente para aquellos productos de tensión de seguridad muy baja.
 (menos de 50 V-AC / 120 V-DC)
 Vale solo per prodotti a Bassissima tensione di sicurezza (inferiore a 50 V-AC / 120 V-DC)

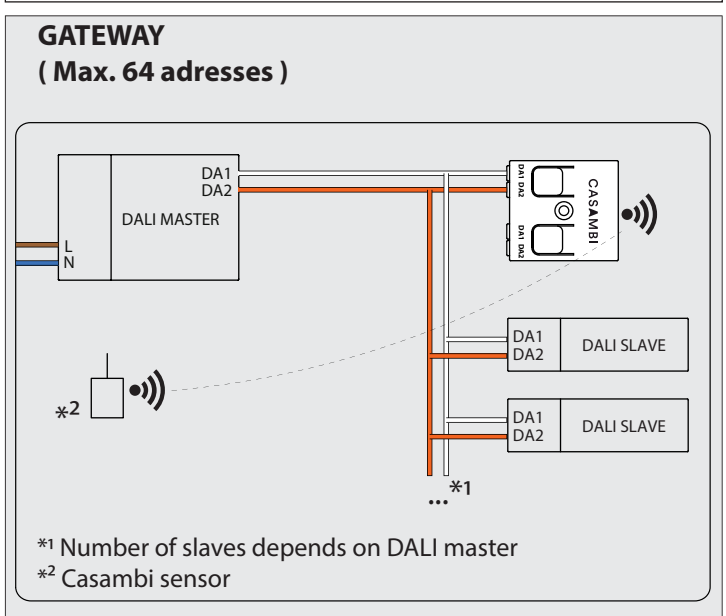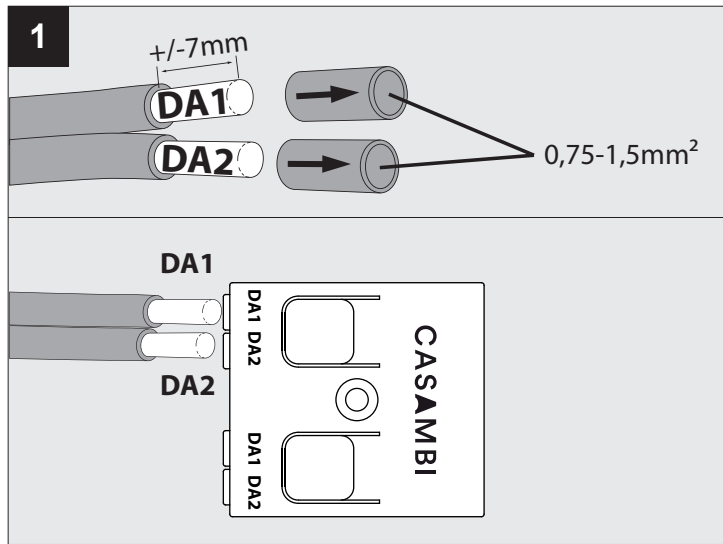

**DIM5
(Broadcast)**

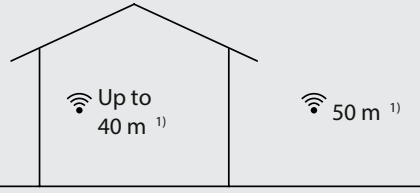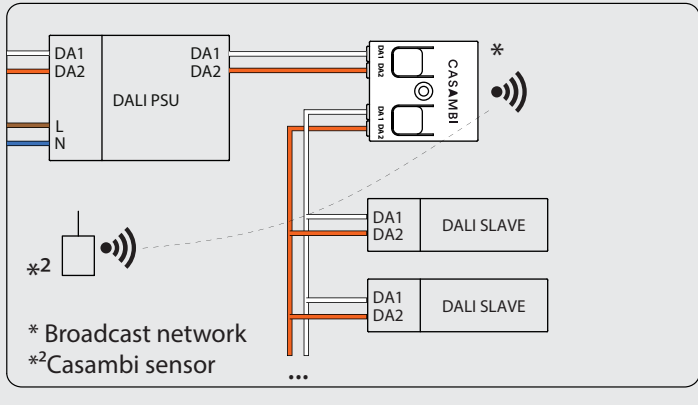

mesh network technology

Device acts also as a repeater. Longer ranges can be achieved by using multiple Casambi units.

¹⁾ Range is highly dependant on the surrounding and obstacles, such as walls and building materials.

MORE INFO FOR WIRELESS DIMMING

https://www.deltalight.com/downloads/CTRL_Delta_SUG.pdf



MORE INFO FOR M - WIRELESS CONTROL DIM5

https://www.deltalight.com/downloads/manual/21032_0085_HAND.pdf



TECHNICAL DATA

RADIO TRANSCEIVER

Operating frequencies: 2,4...2,483 Ghz
Maximum output power: +4 dBm

OPERATING CONDITIONS

Ambient temperature, TA: -20...+45°C
Max. case temperature, TC : +65°C
Storage temperature: -25...+75°C
Max. relative humidity: 0...80%, non cond

CONNECTORS

Wire range, solid & stranded: 0,5-1,5mm²
16-20AWG
Wire strip length: 6-8mm

MECHANICAL DATA

Dimensions: 40,4 x 36,3 x 14 mm
Weigth: 15g
Degree of protection: IP20 (Indoor)

NETWORK

Only available with Evolution firmware version 32.0

NETWORK

Device limit: 64 DALI instances