

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)  
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)  
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)  
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)  
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)  
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

**Not compatible with Class I devices and not with other companies Class III devices**

**IP20**  
Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm  
Protégé contre les objets solides de plus de 12 mm  
Geschützt gegen Festkörper größer als 12 mm  
Protected against solid objects greater than 12 mm  
Protegido contra objetos sólidos superiores a 12 mm  
Protetto contro oggetti solidi più grandi di 12 mm

**Install suitable means for overload and short-circuit protection according to local installation requirements. ( IEC 60364-7-715)**


|  |  |  |
|--|--|--|
| <p><b>1</b></p> <p><b>SLM26L-CEILING FIXATION</b></p> <p><b>23358 9830</b></p> <p>◇ B</p> <p>0,1</p> | <p><b>2</b></p> <p><b>SLM26L-2P SUPPORT</b></p> <p><b>23358 9820</b></p> <p>◇ B</p> <p>0,1</p> | <p><b>3</b></p> <p><b>SLM26L-2P CONNECTOR 48V</b></p> <p><b>23358 9810</b></p> <p>◇ B / GC</p> <p>48V-DC MAX. 200W<br/>SUPPLY / MAX.50m<br/>◇ 0,7 IP20</p> |
|--|--|--|

|  |   |  |
|--|---|--|
| <p><b>SLM26L-SIDE SUPPLY 48V</b></p> <p><b>23358 1540</b></p> <p>◇ B</p> <p>48V-DC MAX. 200W<br/>SUPPLY / MAX.50m<br/>◇ 0,1 IP20</p> | <p><b>SLM - ROD SUSPENSION 0,8m + CONNECTION</b></p> <p><b>23358 1510</b></p> <p>◇ B / W</p> <p>0,5<br/>EXCL. CABLING</p> | <p><b>SLM - ROD SUSPENSION 0,8m</b></p> <p><b>23358 1520</b></p> <p>◇ B / W</p> <p>0,3<br/>EXCL. CABLING</p> |
|--|---|--|


## SLM26L MATRIX

DEEL  
PARTIE  
TEIL  
PART  
PARTE  
PARTE

**A**

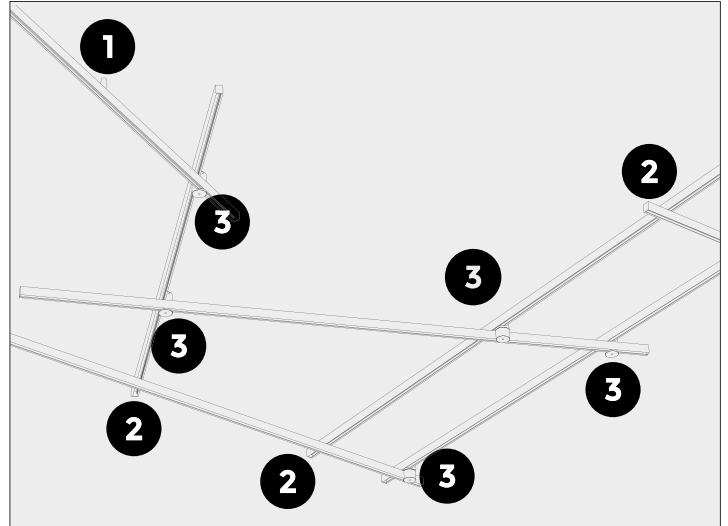

### SLM26L - 2P CONNECTOR 48V

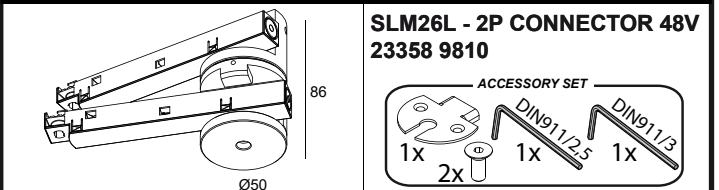


48V-DC ( 2 conductors )


**MAX. 200W, MAX 50M**

2 DIM conductors ( for individual dimming )  
DALI dimmable luminaires on request

**IN COMBINATION WITH  
TO BE ORDERED SEPARATELY**  
**SLM26L - CEILING FIXATION**  
**23358 9830**

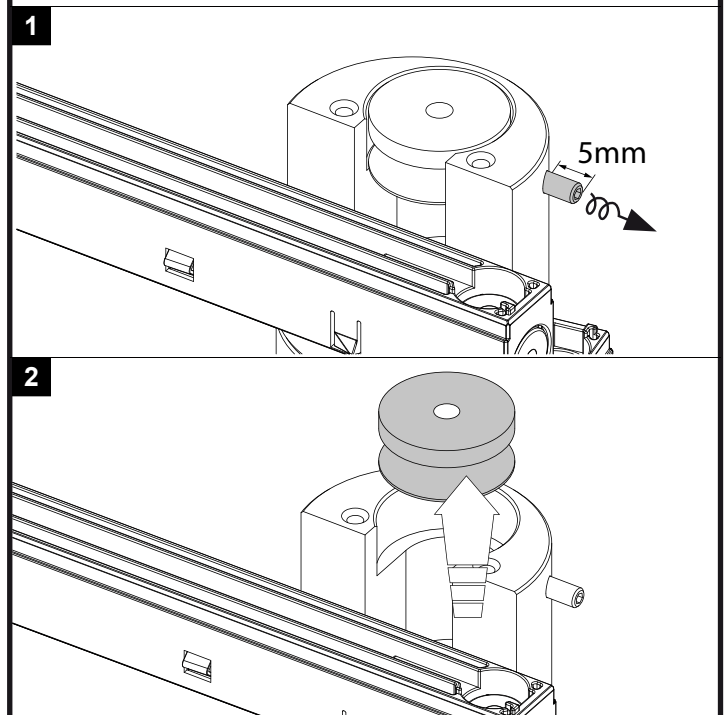


3

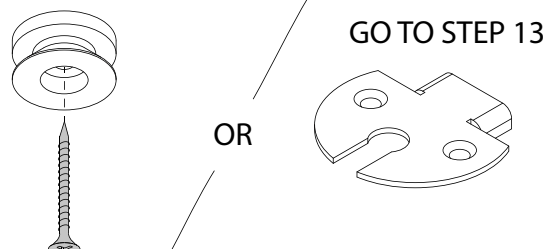

GO TO STEP 13


OR

4

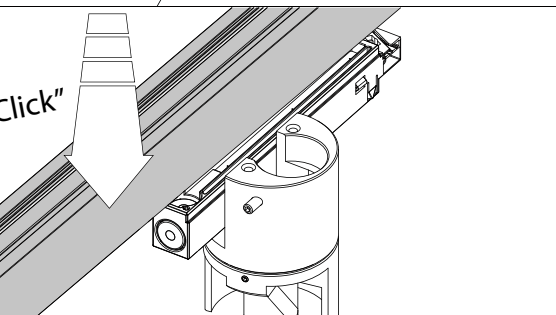


"Click"

5

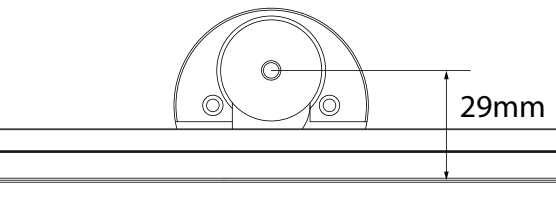


29mm

**TO BE ORDERED SEPARATELY**  
SLM26L - FIXATION SET  
23358 1410

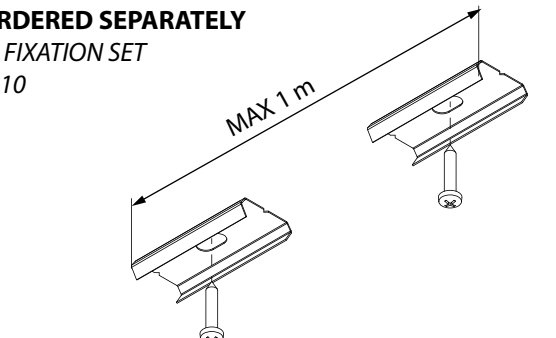

MAX 1 m

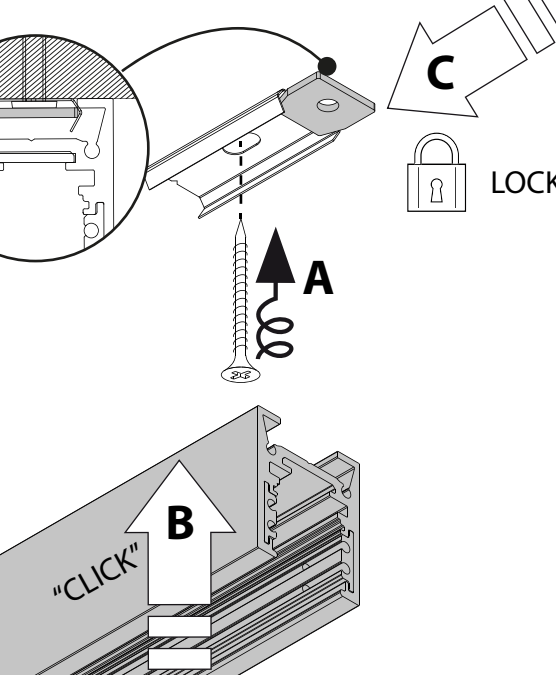

**A**


**B**

**C**

LOCK


"CLICK"

6

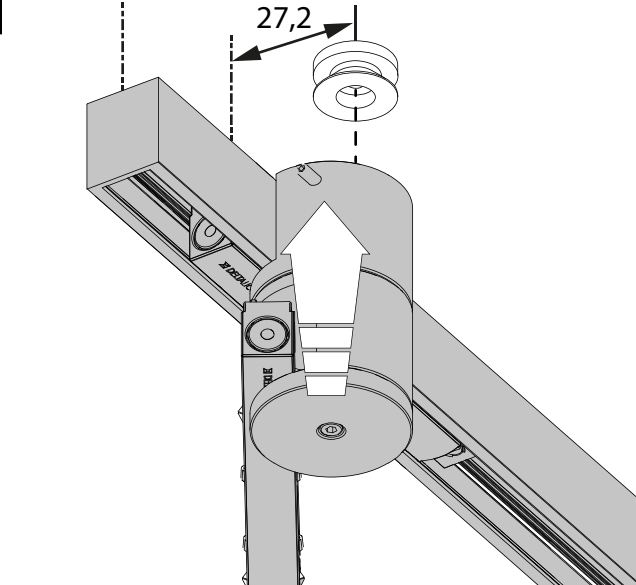


27,2


7

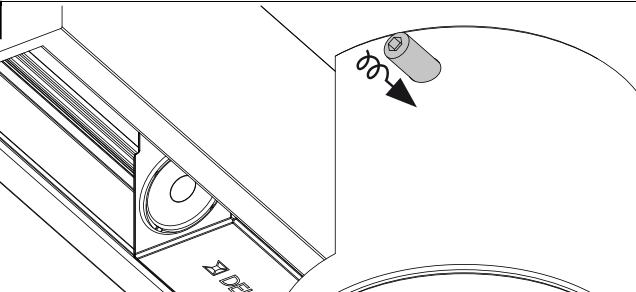


8

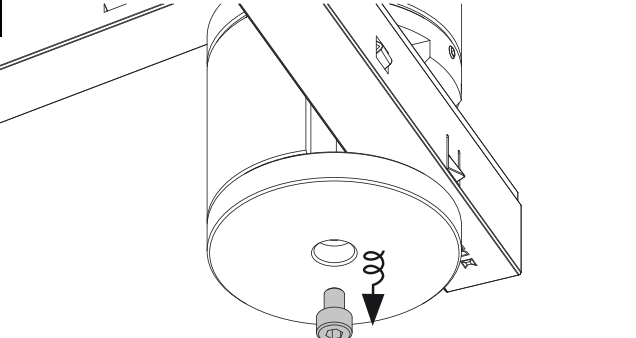



9

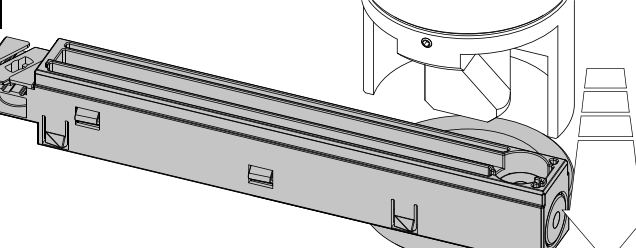


10

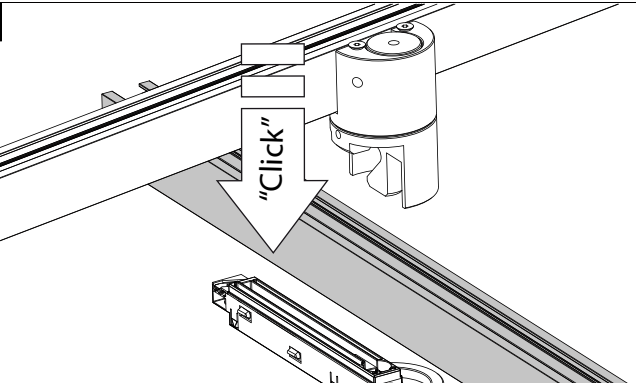

"Click"

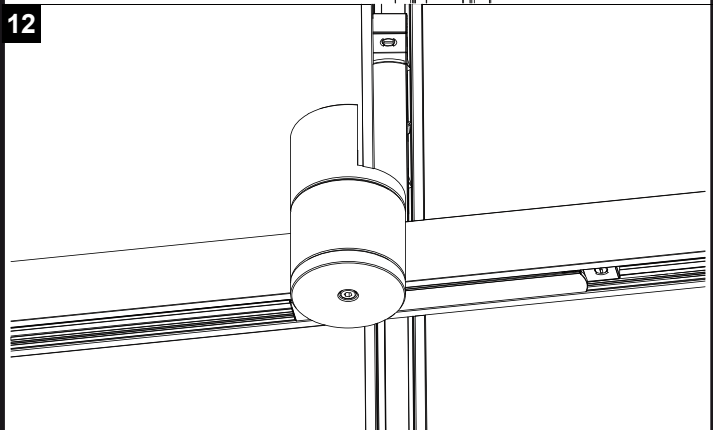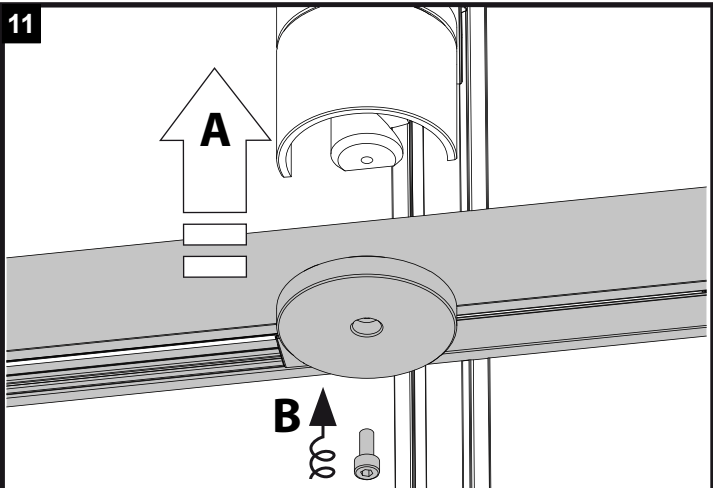

ADDING AN “EXTRA” LAYER










800  
Ø15




**IN COMBINATION WITH  
TO BE ORDERED SEPARATELY**  
SLM - ROD SUSPENSION 0,8m  
23358 1520

ACCESSORY SET


- 1x
- 1x
- 1x
- 1x
- 1x
- 1x
- 1x

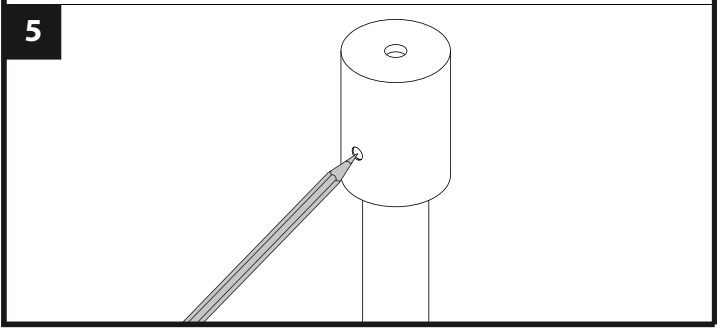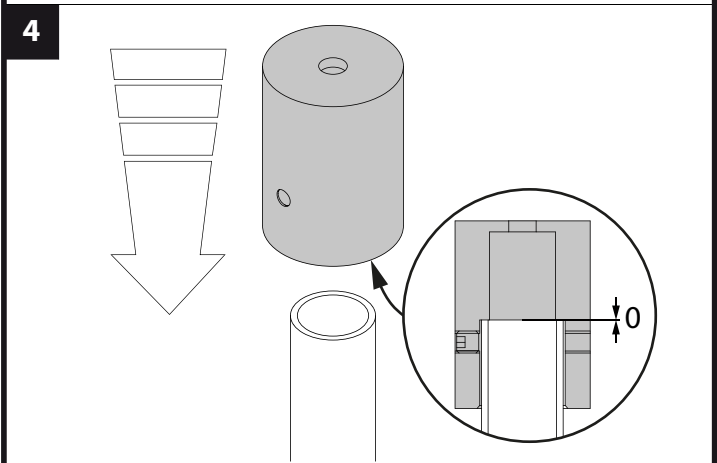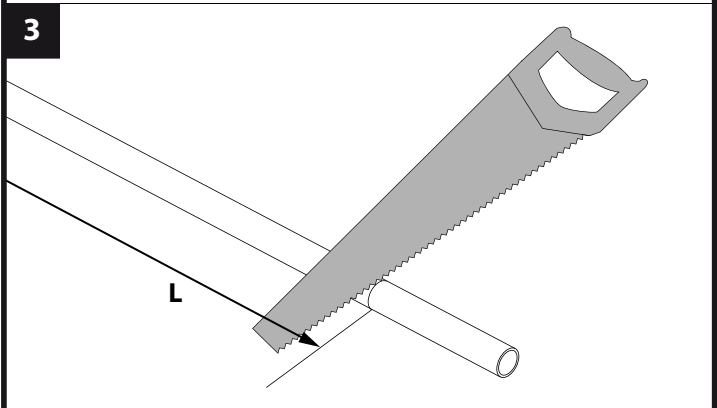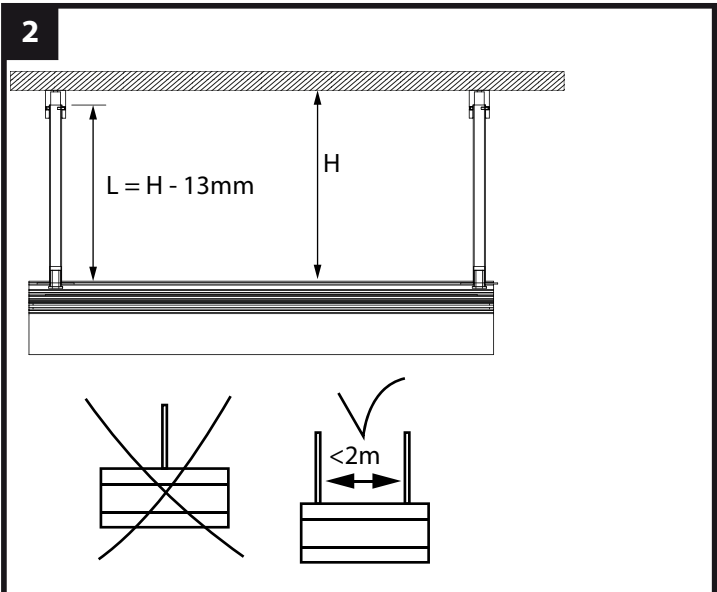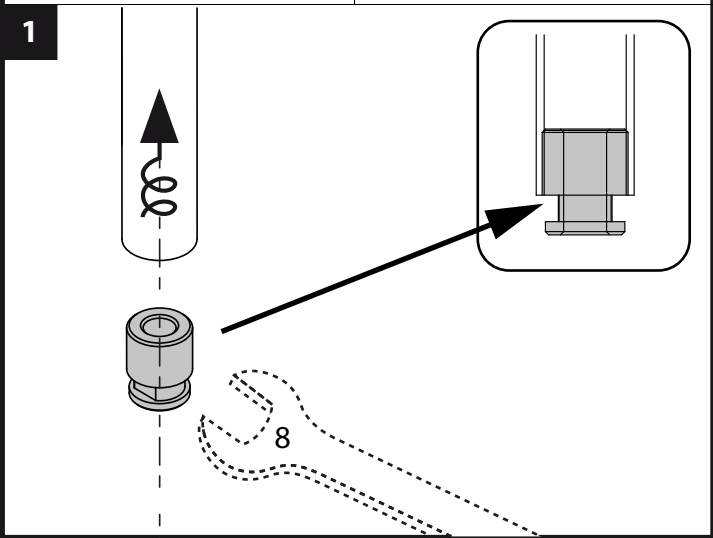

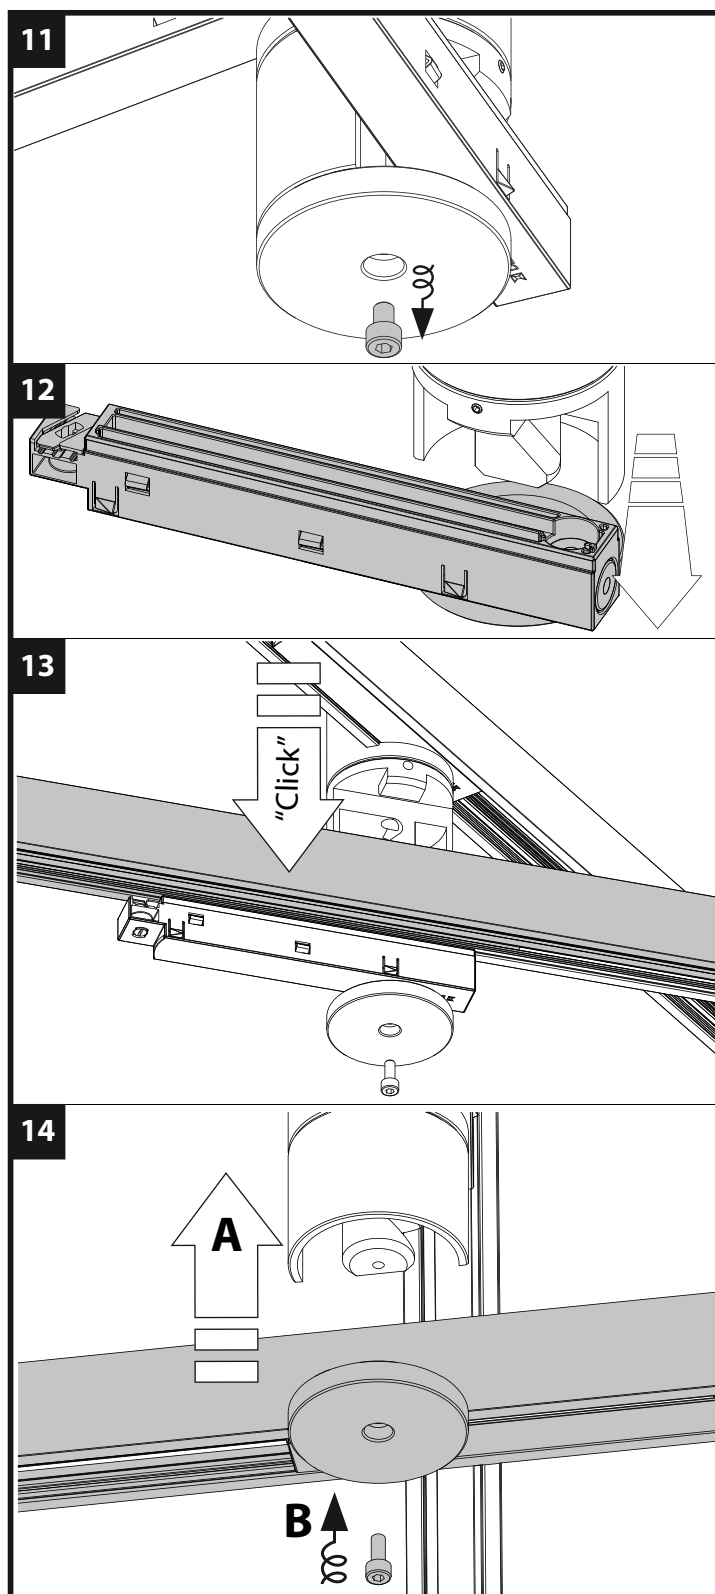
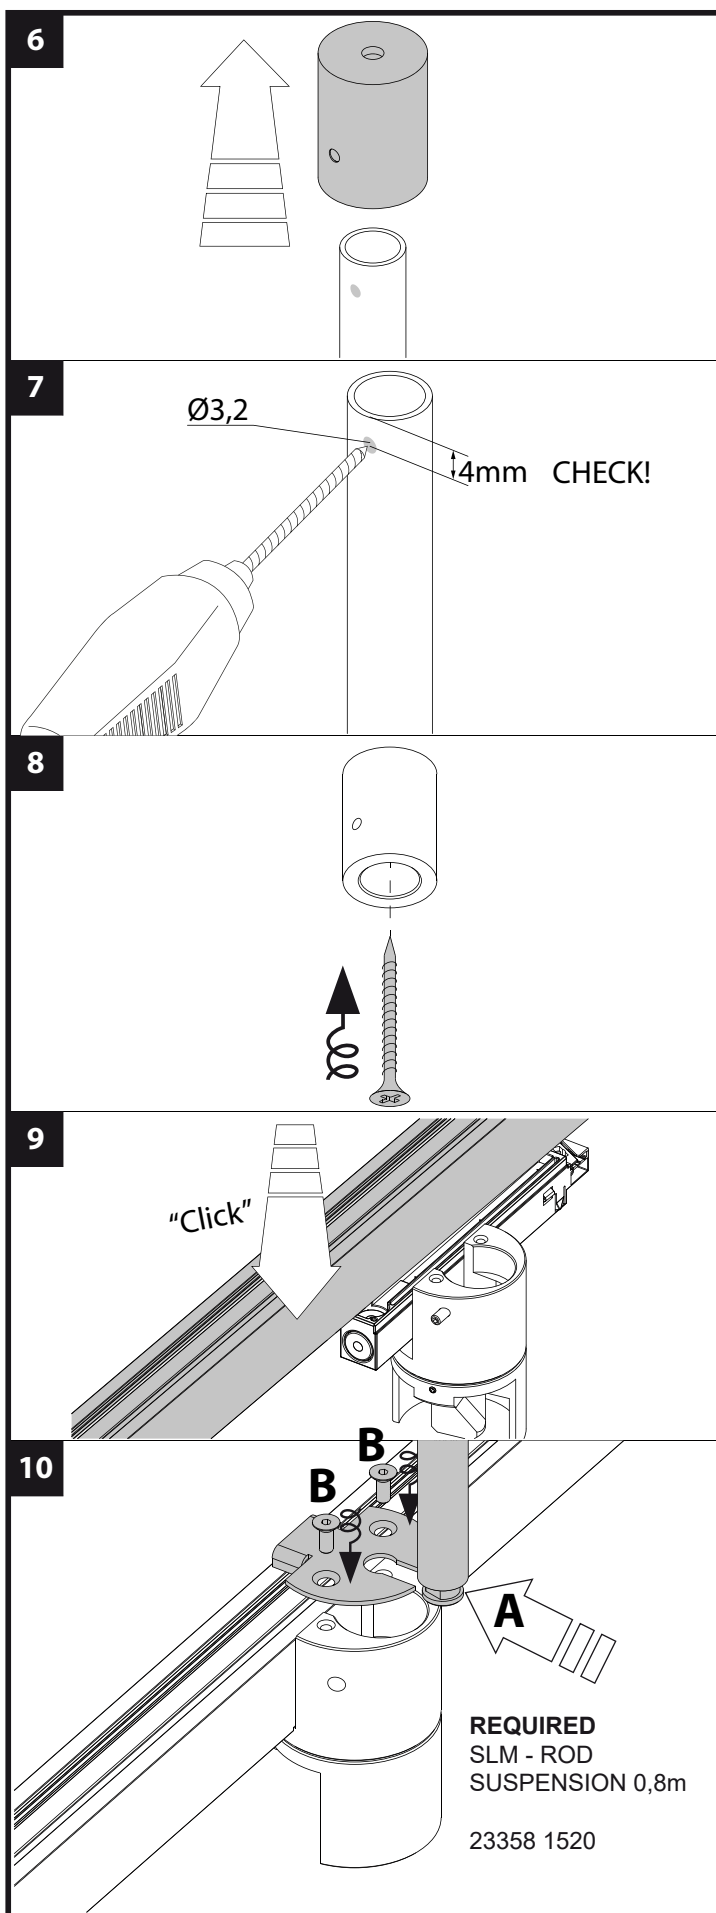


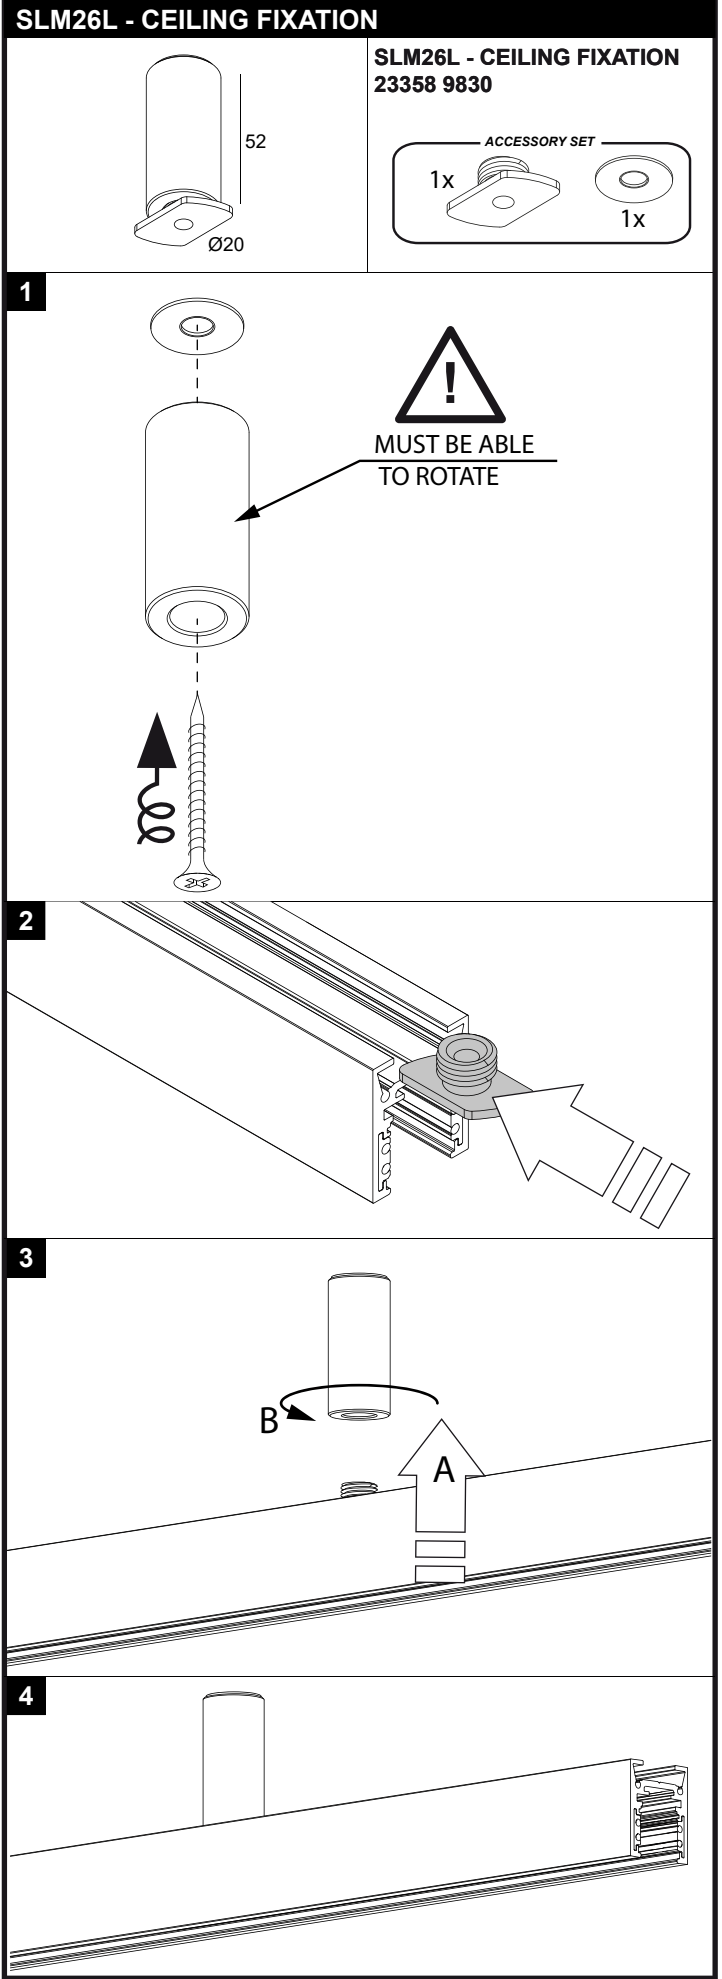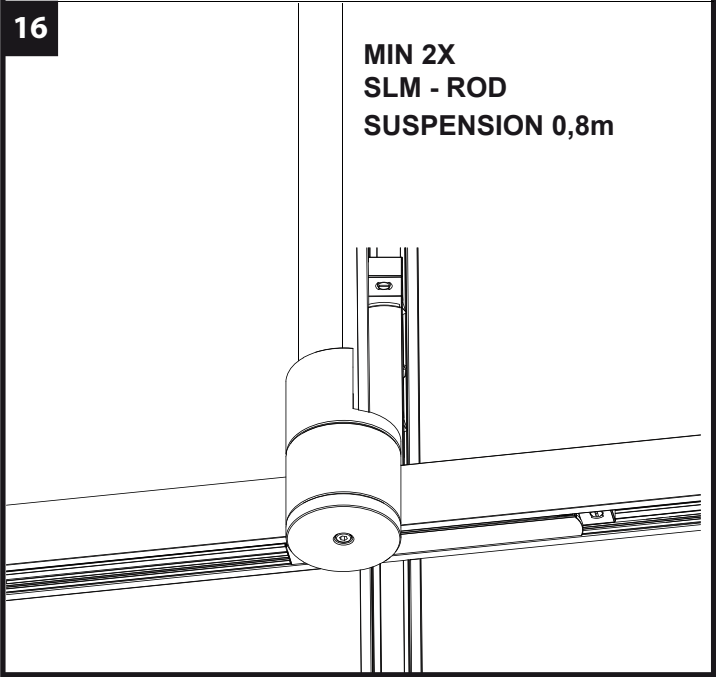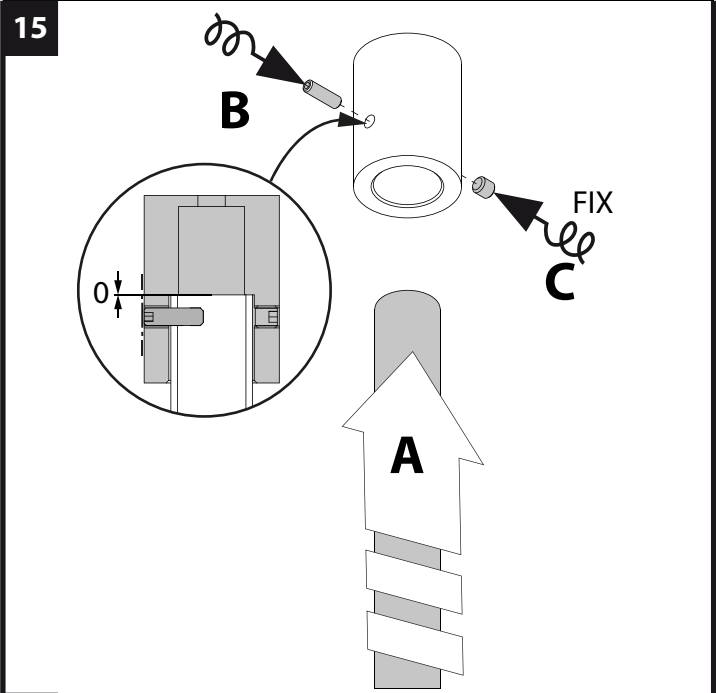


## SLM26L - 2P SUPPORT



**SLM26L - 2P SUPPORT**  
23358 9820

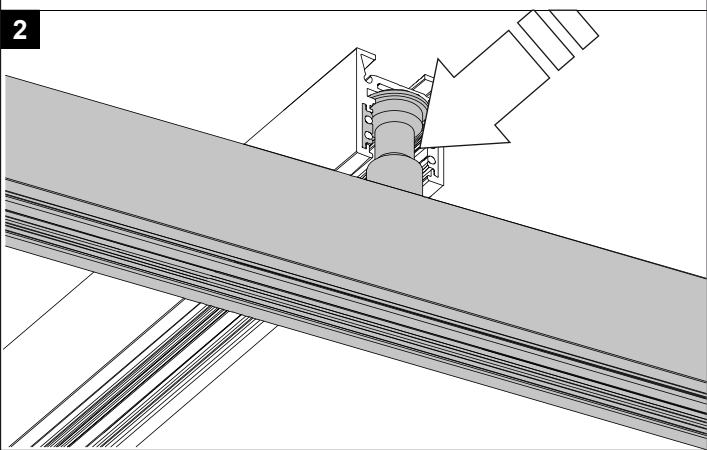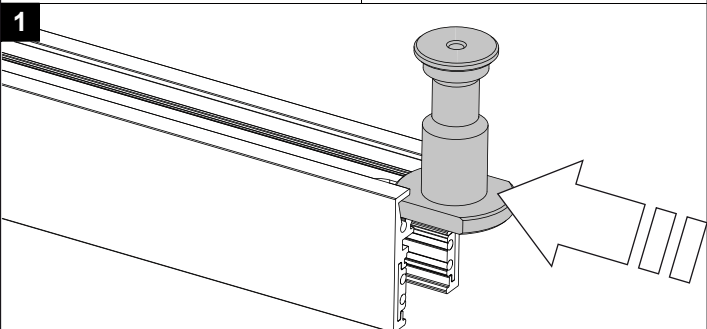

## SLM26L - SIDE SUPPLY 48V





**SLM26L - SIDE SUPPLY 48V**  
13358 1540



48V-DC ( 2 conductors )


**MAX. 200W, MAX 50M**

2 DIM conductors ( for individual dimming )  
DALI dimmable luminaires on request

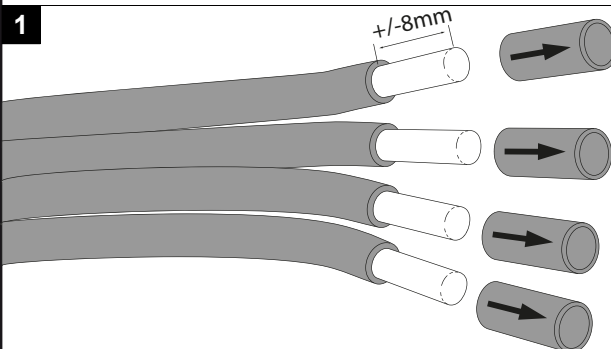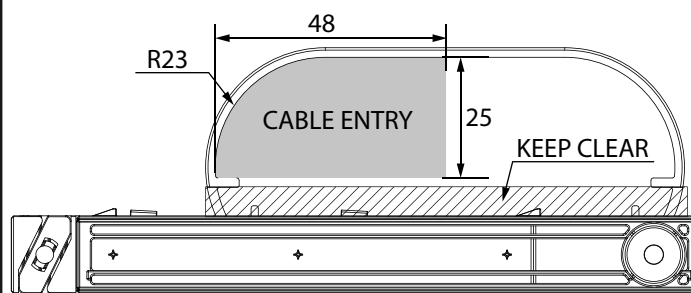






**2** BLUE -> 48V-DC  
BROWN -> 48V-DC  
RED -> DA1 / 48V-DC  
BLACK -> DA2 / 48V-DC

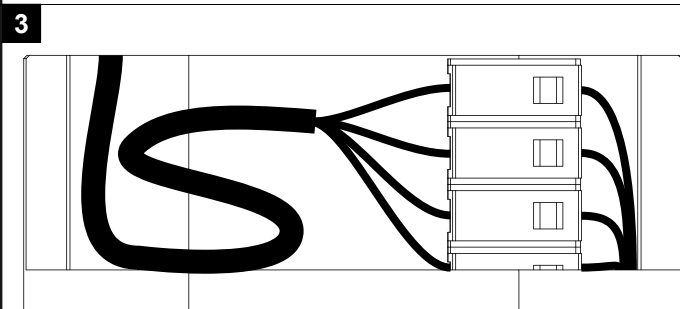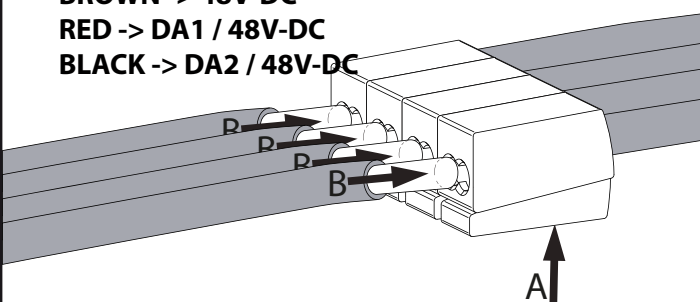


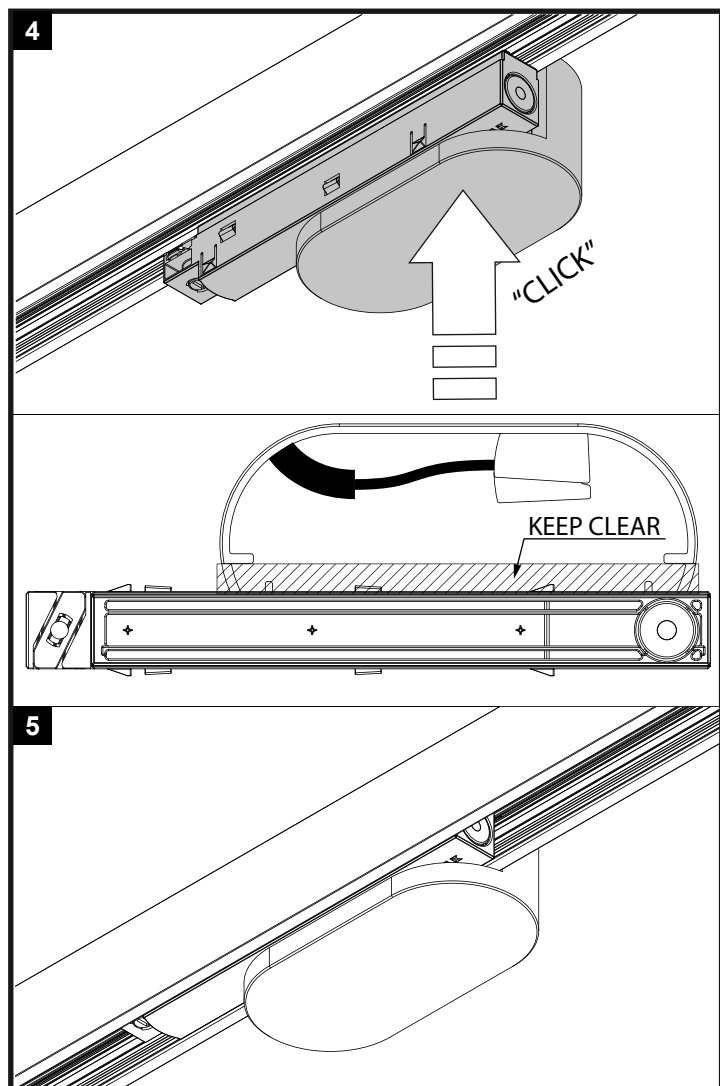


## SLM - ROD SUSPENSION 0,8m


SLM - ROD SUSPENSION 0,8m  
23358 1520

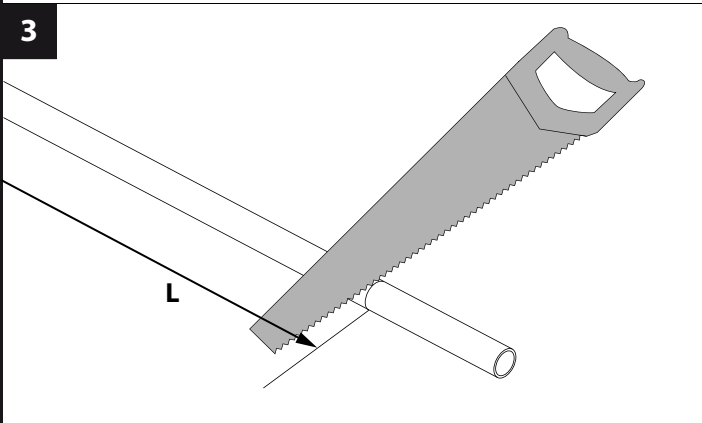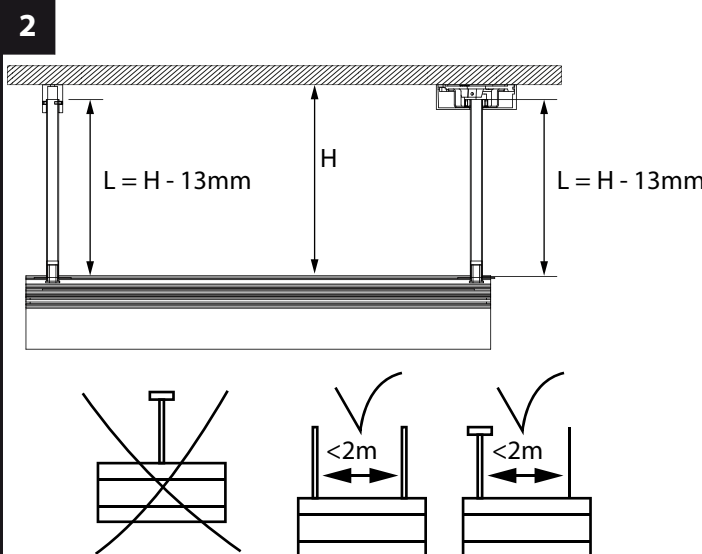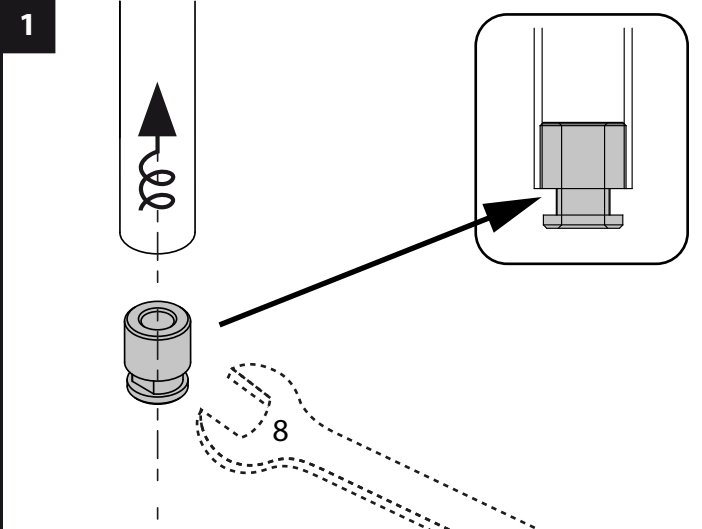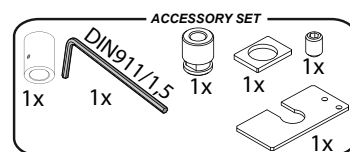



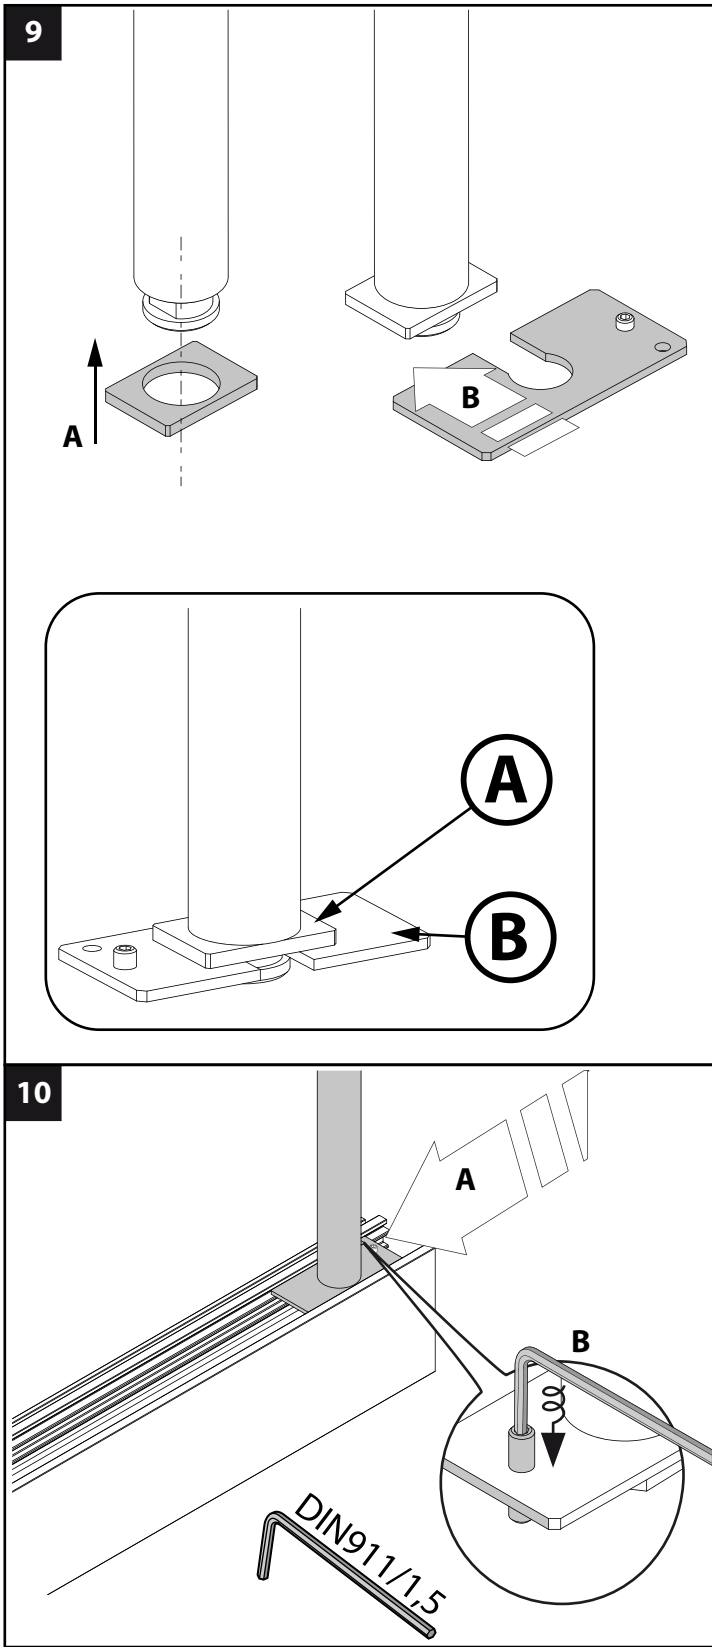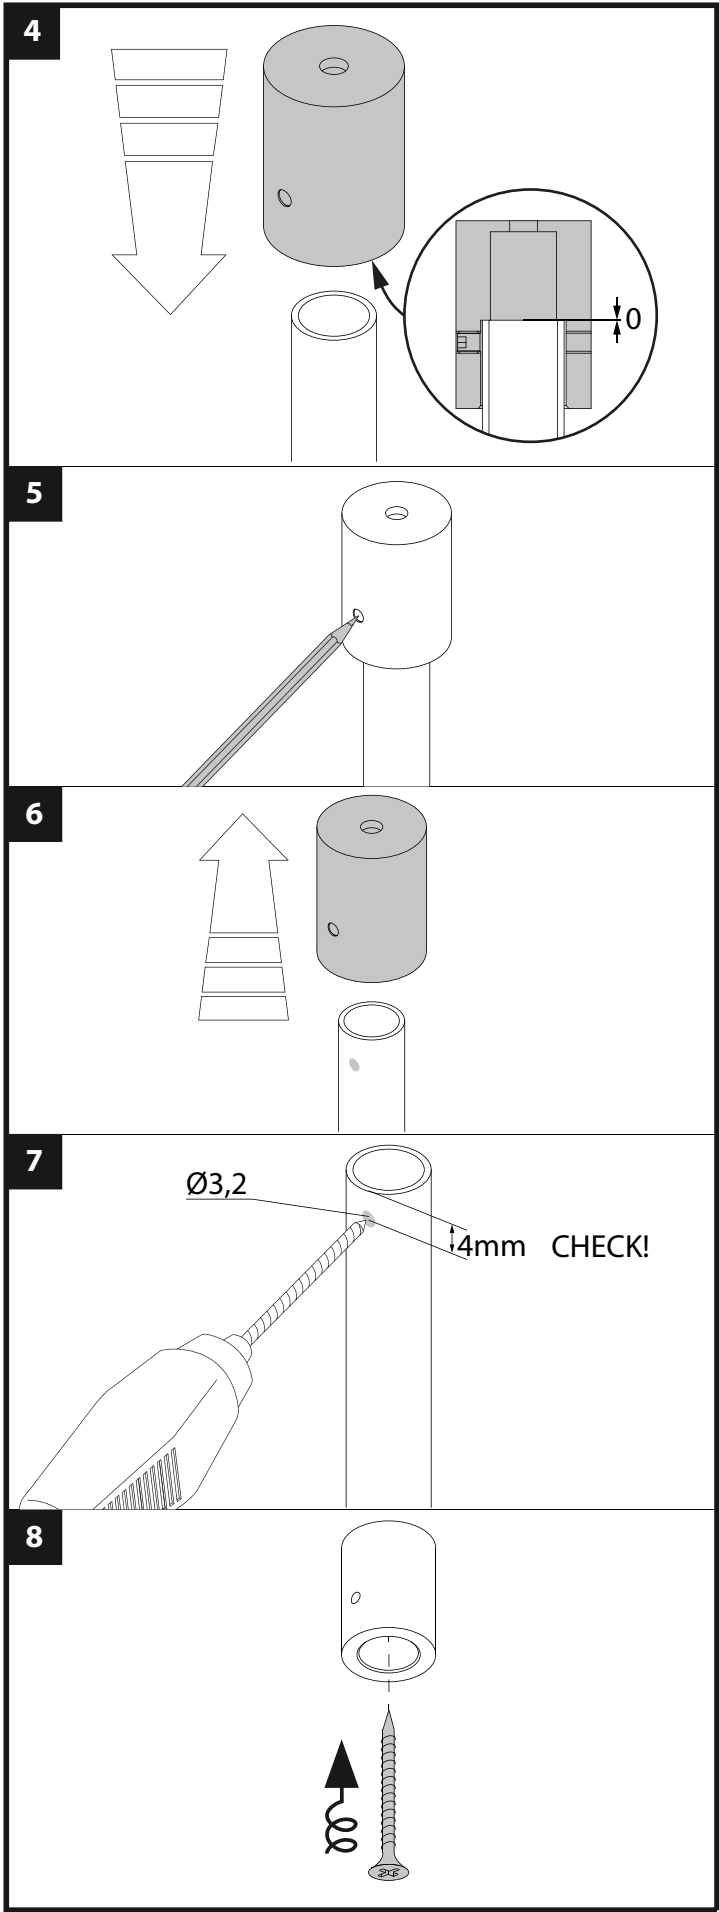



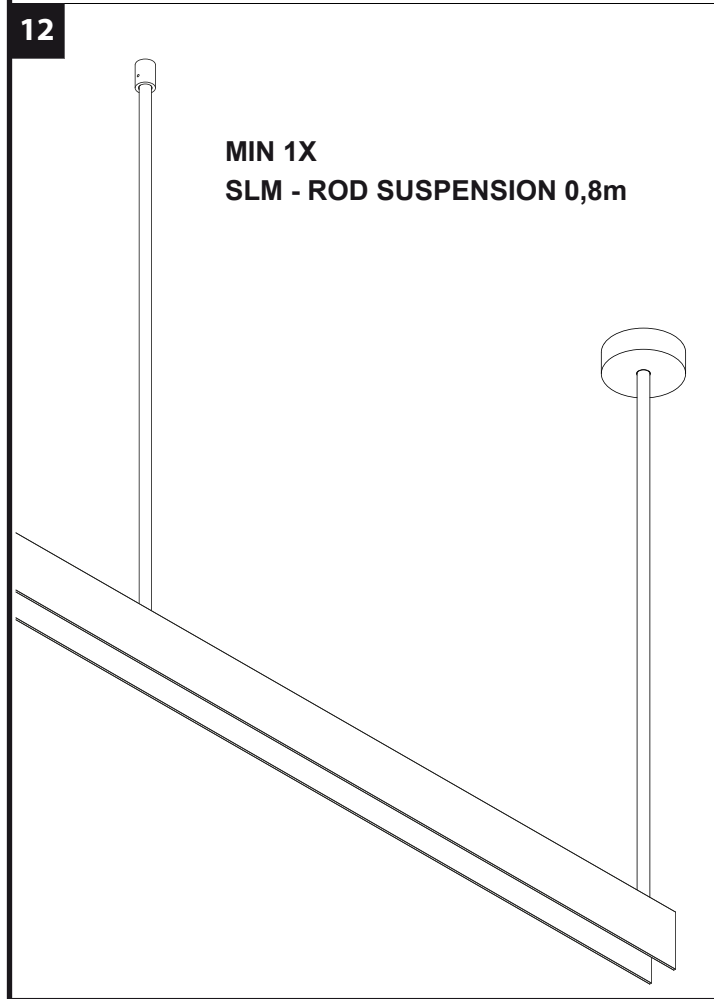

**SLM - ROD SUSPENSION 0,8m  
+ Connection  
23358 1510**

