


Voorzien van aardingsaansluiting
 Avec mise à la terre
 Ausgerüstet mit Erdungsanschluss
 Provided with grounding
 Con la toma de tierra
 Con presa a terra

IP20
 Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
 Protégé contre les objets solides de plus de 12 mm
 Geschützt gegen Festkörper größer als 12 mm
 Protected against solid objects greater than 12 mm
 Protegido contra objetos sólidos superiores a 12 mm
 Protetto contro oggetti solidi più grandi di 12 mm

OAO - PROFILE

OAO - PROFILE
 404 00 00

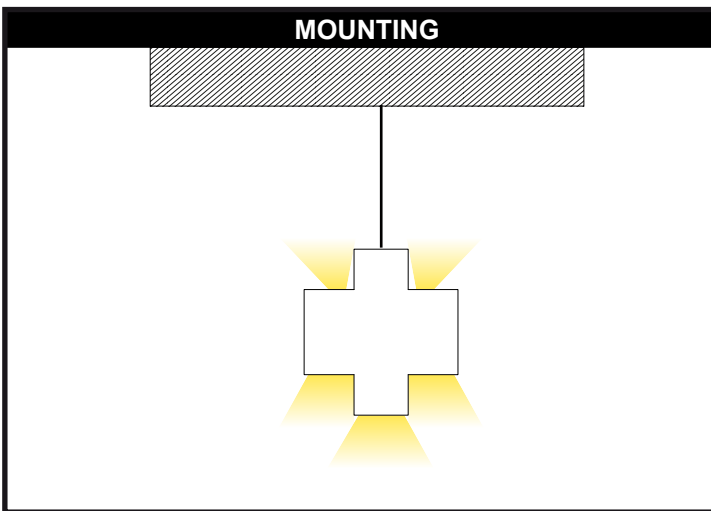

OAO - PROFILE

DEEL
 PARTIE
 TEIL
 PART
 PARTE
 PARTE









A

ELECTRICAL CONNECTION


	<p>LED POWER SUPPLY 24V-DC KIT 60W DIM1 404 24 60 ED1</p> <p>ACCESSORY SET 1x [Image] 2x [Image] 1x [Image]</p>
OR	
	<p>LED POWER SUPPLY 24V-DC KIT 100W 404 24 100</p> <p>ACCESSORY SET 1x [Image] 2x [Image] 1x [Image]</p>
	<p>CURRENT SUPPLY 377 98 51 - L1,6m / 3x075mm² 377 98 56 - L6m / 3x075mm² 377 99 51 - L1,6m / 5x075mm² 377 99 56 - L6m / 5x075mm²</p> <p>ACCESSORY SET 1x [Image]</p>

1

2

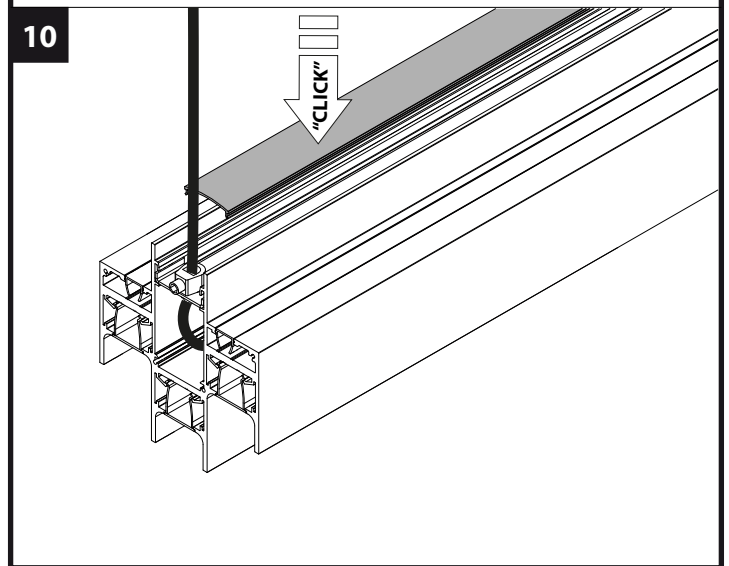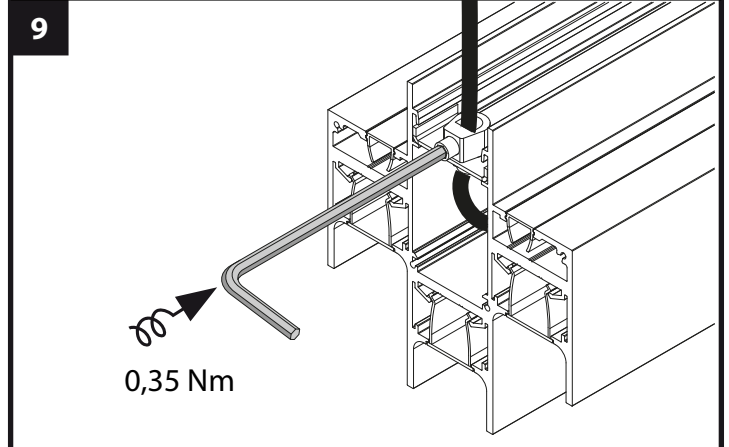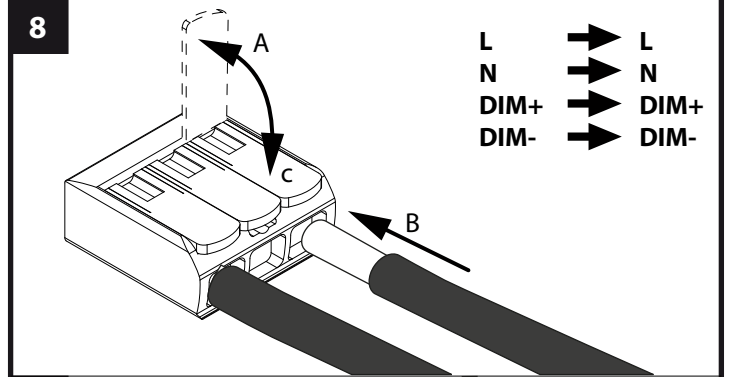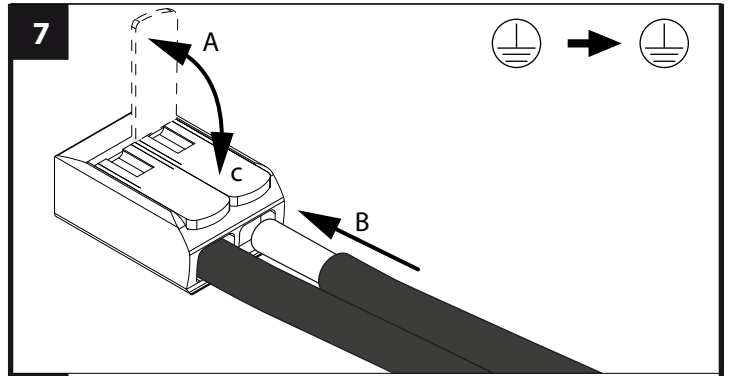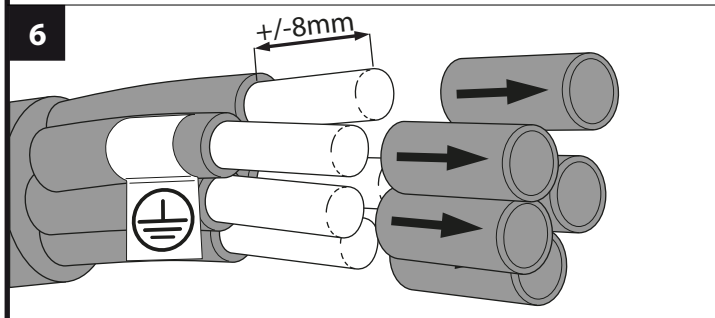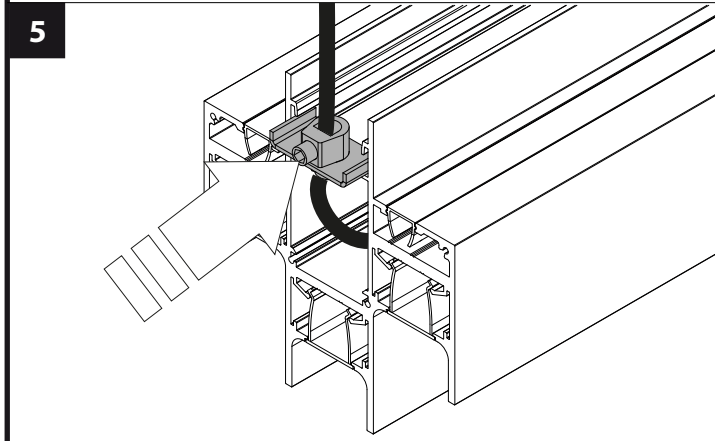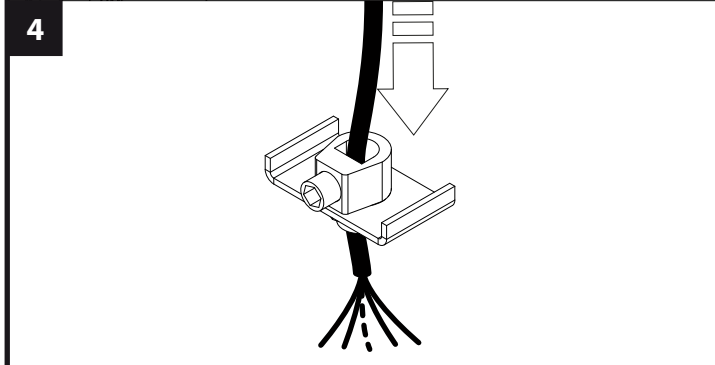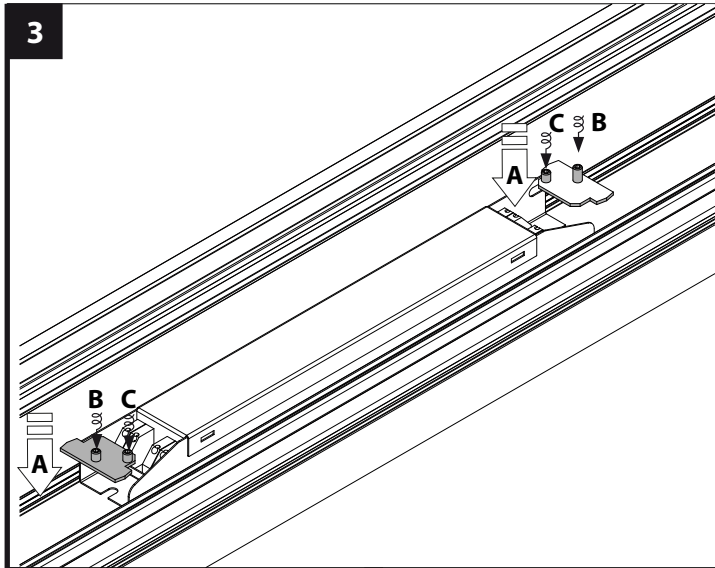

OAO - ROD SUSPENSION

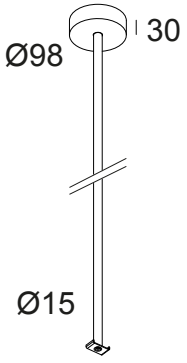





OAO - ROD
SUSPENSION 0,4m
328 27 40

OR


OAO - CENTRAL ROD
SUSPENSION 0,8m
328 27 80

400
or
800


ACCESSORY SET



1

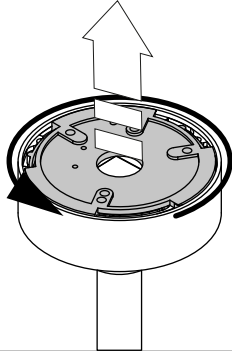


2

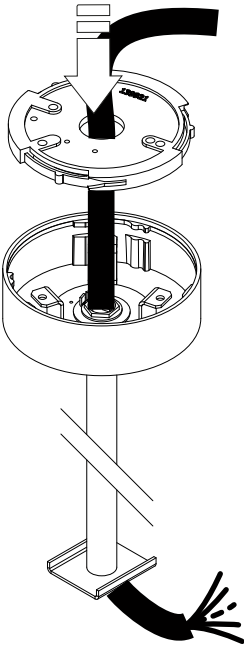


377 98 51
or
377 98 56
or
377 99 51
or
377 99 56

3

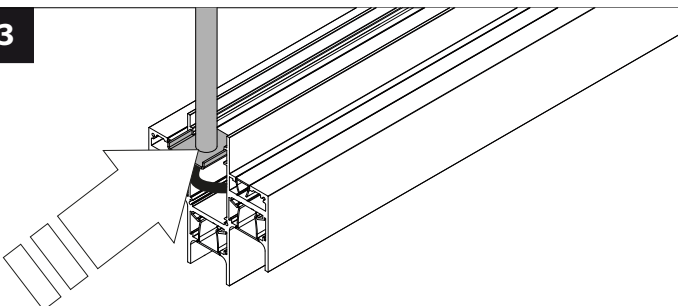


4

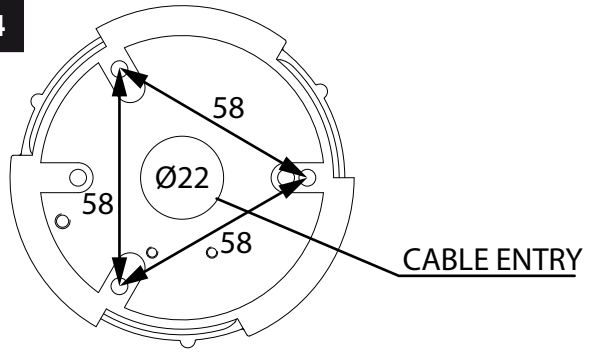



CABLE ENTRY

5

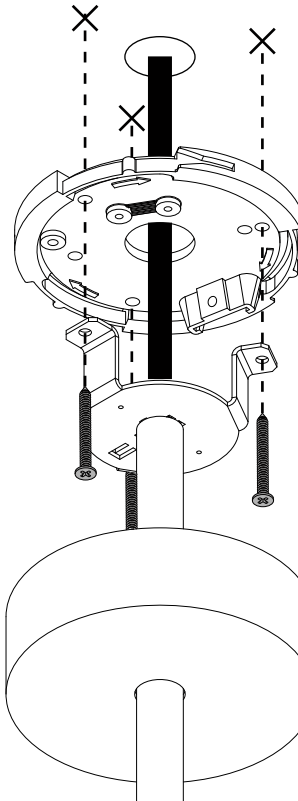




6

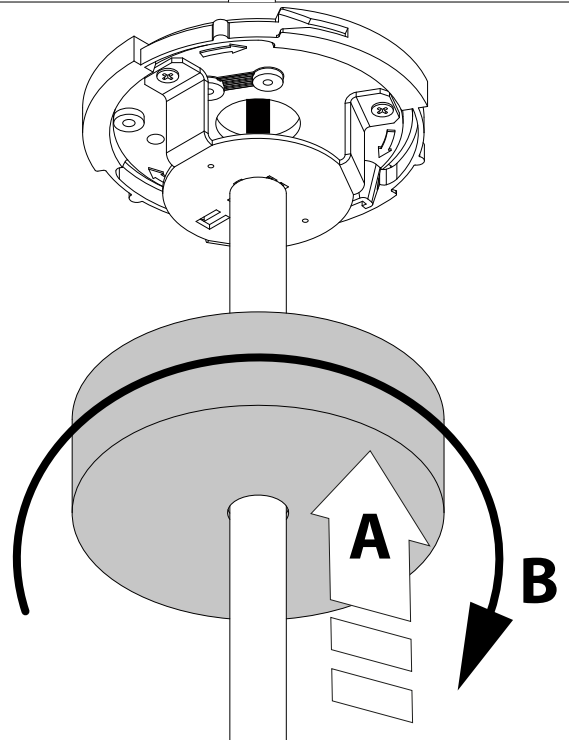


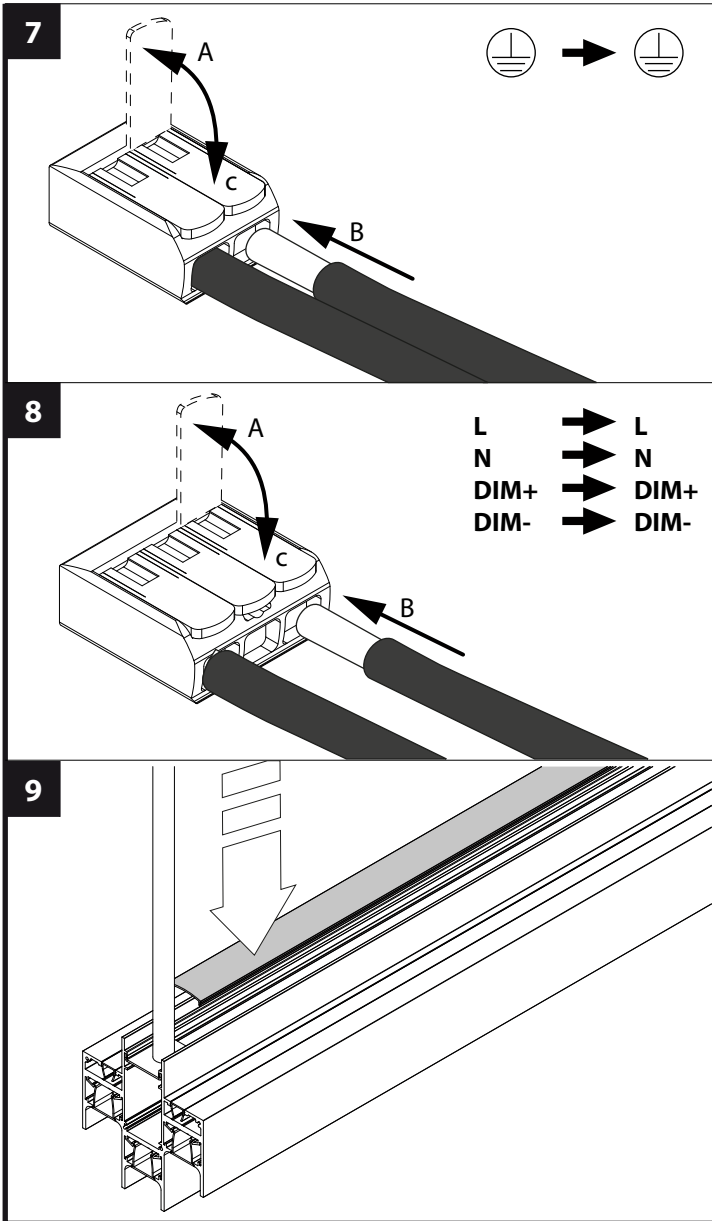


OAO - CABLE SUSPENSION

OAO - CABLE SUSPENSION
SINGLE 1,6m
404 09 01

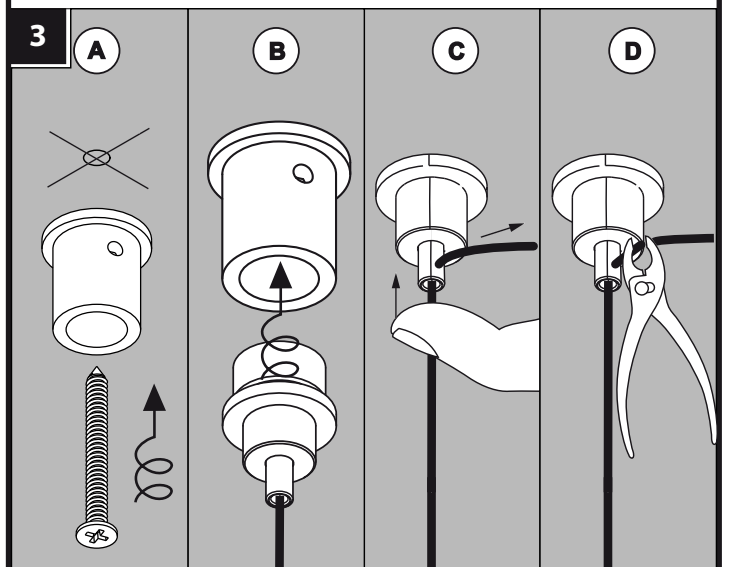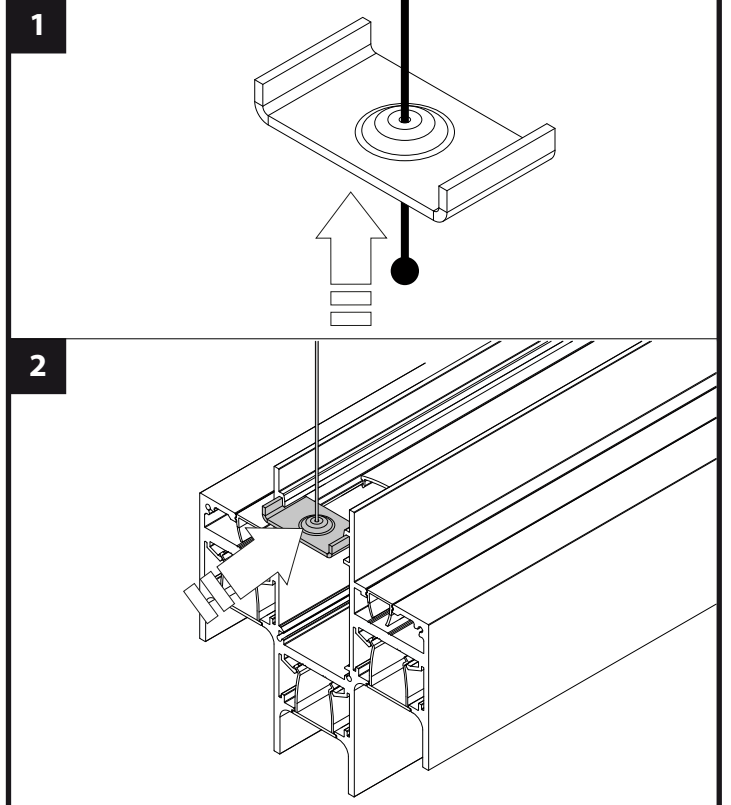

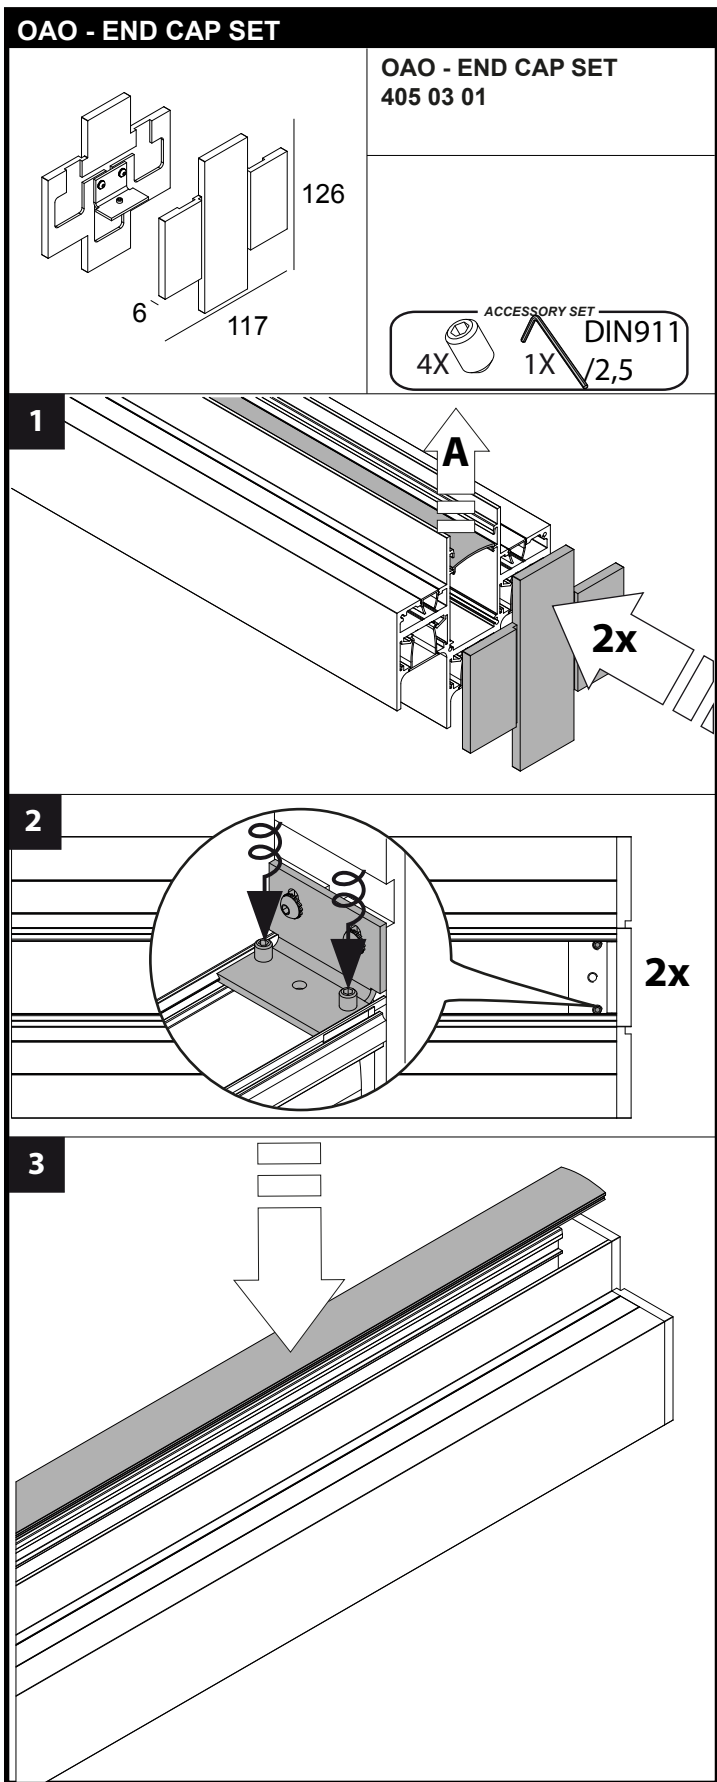

<p>LEDFLEX </p> <p>5m - 24V-DC 0,3</p>	
WHITE	
Dividable per 55mm 126 smd LED/m	
9,8W/m 1000lm/m *	
CRI > 90	
4000 K	IN LEDFLEX IN MP 940 300 91 56 94
3000 K	IN LEDFLEX IN MP 930 300 91 56 93
2700 K	IN LEDFLEX IN MP 927 300 91 56 92

FULL INFO / PAG TEC

LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.2m
OPTIONS 24V-DC / 4A DIM UNIT	
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.4m
OPTIONS 24V-DC / 4A DIM UNIT	
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.6m
OPTIONS 24V-DC / 4A DIM UNIT	
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80 ED1	max.8m
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.15m (max.10m / Powerline)
OPTIONS 24V-DC / 4A DIM UNIT	
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.2m
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.2m

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

*+/- 5%