


POWERLINE CEILING

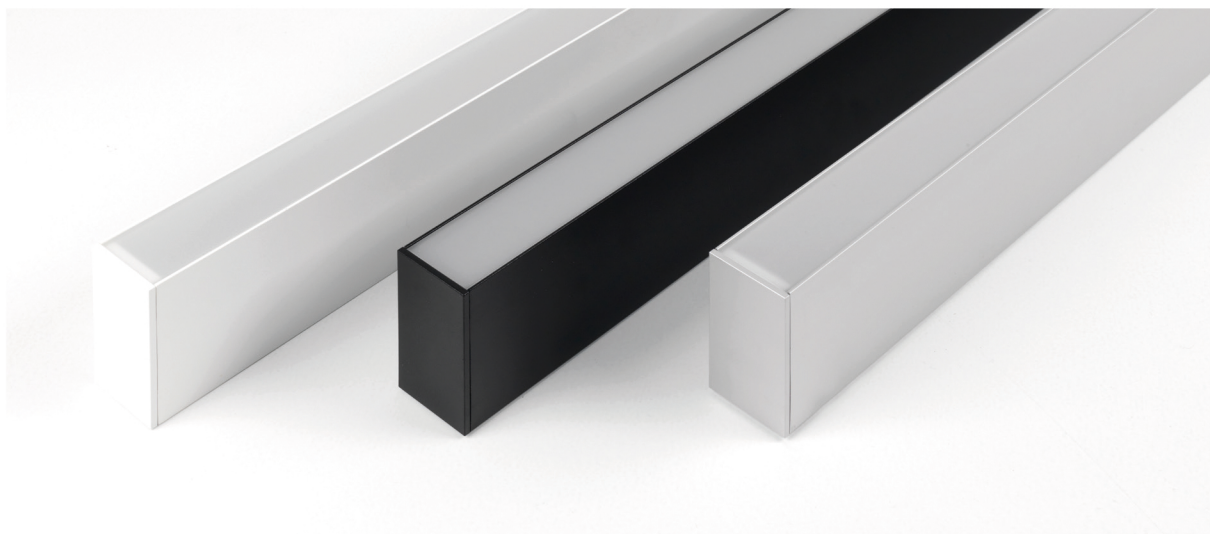


PROFILE COLORS	CRI	CCT	HEIGHT	WIDTH
A anodised aluminium	+80	2.700 K / 827	75	38
W white matt texture RAL9016	+80	3.000 K / 830	75	38
B black matt texture RAL9005	+80	4.000 K / 840	75	38

REMARK: - DALI version = PUSH DIM compatible
- other RAL colors on request

REFERENCE BUILDER: PLA/580/830/ND/O

REFERENCE	DIM	POWER CONS (W)	LUMEN OUTPUT (lm)	LENGTH (mm)
Powerline ON ceiling 580 mm				
PL_/580/___/ND/O	-	13	1.575	580
PL_/580/___/A/O	1-10 V	13	1.575	580
PL_/580/___/D/O	DALI	13	1.575	580
Powerline ON ceiling 860 mm				
PL_/860/___/ND/O	-	19,5	2.362	860
PL_/860/___/A/O	1-10 V	19,5	2.362	860
PL_/860/___/D/O	DALI	19,5	2.362	860
Powerline ON ceiling 1.140 mm				
PL_/1140/___/ND/O	-	26	3.150	1.140
PL_/1140/___/A/O	1-10 V	26	3.150	1.140
PL_/1140/___/D/O	DALI	26	3.150	1.140
Powerline ON ceiling 1.420 mm				
PL_/1420/___/ND/O	-	32,5	3.920	1.420
PL_/1420/___/A/O	1-10 V	32,5	3.920	1.420
PL_/1420/___/D/O	DALI	32,5	3.920	1.420
Powerline ON ceiling 1.700 mm				
PL_/1700/___/ND/O	-	39	4.725	1.700
PL_/1700/___/A/O	1-10 V	39	4.725	1.700
PL_/1700/___/D/O	DALI	39	4.725	1.700
Powerline ON ceiling 1.980 mm				
PL_/1980/___/ND/O	-	45,5	5.500	1.980
PL_/1980/___/A/O	1-10 V	45,5	5.500	1.980
PL_/1980/___/D/O	DALI	45,5	5.500	1.980
Powerline ON ceiling 2.260 mm				
PL_/2260/___/ND/O	-	52	6.300	2.260
PL_/2260/___/A/O	1-10 V	52	6.300	2.260
PL_/2260/___/D/O	DALI	52	6.300	2.260

POWERLINE CEILING

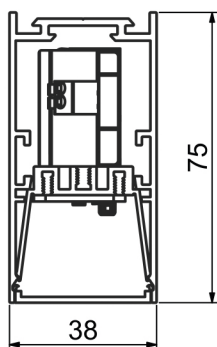

REFERENCE	DIM	POWER CONS (W)	LUMEN OUTPUT (lm)	LENGTH (mm)
Powerline ON ceiling 2.540 mm				
PL_/2540/___/ND/O	-	58,5	7.080	2.540
PL_/2540/___/A/O	1-10 V	58,5	7.080	2.540
PL_/2540/___/D/O	DALI	58,5	7.080	2.540
Powerline ON ceiling 2.820 mm				
PL_/2820/___/ND/O	-	65	7.860	2.820
PL_/2820/___/A/O	1-10 V	65	7.860	2.820
PL_/2820/___/D/O	DALI	65	7.860	2.820
Powerline ON ceiling 3.100 mm				
PL_/3100/___/ND/O	-	71,5	8.660	3.100
PL_/3100/___/A/O	1-10 V	71,5	8.660	3.100
PL_/3100/___/D/O	DALI	71,5	8.660	3.100
Powerline ON ceiling 3.380 mm				
PL_/3380/___/ND/O	-	78	9.450	3.380
PL_/3380/___/A/O	1-10 V	78	9.450	3.380
PL_/3380/___/D/O	DALI	78	9.450	3.380
Powerline ON ceiling 3.660 mm				
PL_/3660/___/ND/O	-	83,5	10.240	3.660
PL_/3660/___/A/O	1-10 V	83,5	10.240	3.660
PL_/3660/___/D/O	DALI	83,5	10.240	3.660
Powerline ON ceiling 3.940 mm				
PL_/3940/___/ND/O	-	91	11.025	3.940
PL_/3940/___/A/O	1-10 V	91	11.025	3.940
PL_/3940/___/D/O	DALI	91	11.025	3.940
Powerline ON ceiling 4.220 mm				
PL_/4220/___/ND/O	-	97,5	11.812	4.220
PL_/4220/___/A/O	1-10 V	97,5	11.812	4.220
PL_/4220/___/D/O	DALI	97,5	11.812	4.220
Powerline ON ceiling 4.500 mm				
PL_/4500/___/ND/O	-	104	12.600	4.500
PL_/4500/___/A/O	1-10 V	104	12.600	4.500
PL_/4500/___/D/O	DALI	104	12.600	4.500