


# POWERLINE RECESSED

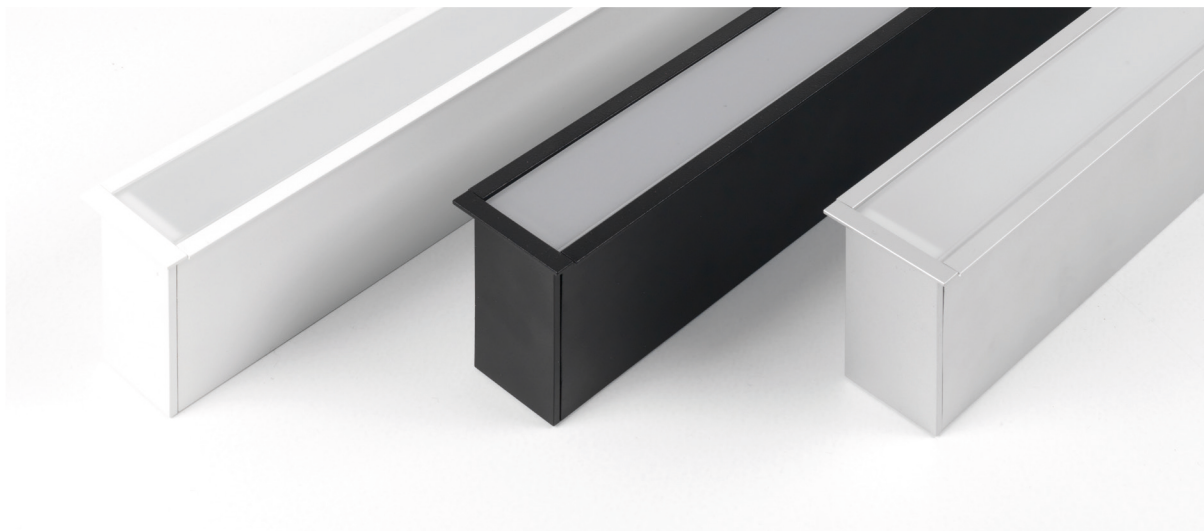


PROFILE COLORS	CRI	CCT	HEIGHT	WIDTH
<b>A</b> anodised aluminium	+80	2.700 K / <b>827</b>	75	51
<b>W</b> white matt texture RAL9016	+80	3.000 K / <b>830</b>	75	51
<b>B</b> black matt texture RAL9005	+80	4.000 K / <b>840</b>	75	51

**REMARK:** - DALI version = PUSH DIM compatible  
- other RAL colors on request

**REFERENCE BUILDER:** PLA/580/830/ND/O

REFERENCE	DIM	POWER CONS (W)	LM OUTPUT (lm)	LENGTH (mm)	CUT-OUT (mm)
<b>Powerline recessed 588 mm</b>					
PLR_/580/___/ND/O	-	13	1.575	588	42 x 582
PLR_/580/___/A/O	1-10 V	13	1.575	588	42 x 582
PLR_/580/___/D/O	DALI	13	1.575	588	42 x 582
<b>Powerline recessed 868 mm</b>					
PLR_/860/___/ND/O	-	19,5	2.362	868	42 x 862
PLR_/860/___/A/O	1-10 V	19,5	2.362	868	42 x 862
PLR_/860/___/D/O	DALI	19,5	2.362	868	42 x 862
<b>Powerline recessed 1.148 mm</b>					
PLR_/1140/___/ND/O	-	26	3.150	1.148	42 x 1.142
PLR_/1140/___/A/O	1-10 V	26	3.150	1.148	42 x 1.142
PLR_/1140/___/D/O	DALI	26	3.150	1.148	42 x 1.142
<b>Powerline recessed 1.428 mm</b>					
PLR_/1420/___/ND/O	-	32,5	3.920	1.428	42 x 1.422
PLR_/1420/___/A/O	1-10 V	32,5	3.920	1.428	42 x 1.422
PLR_/1420/___/D/O	DALI	32,5	3.920	1.428	42 x 1.422
<b>Powerline recessed 1.708 mm</b>					
PLR_/1700/___/ND/O	-	39	4.725	1.708	42 x 1.702
PLR_/1700/___/A/O	1-10 V	39	4.725	1.708	42 x 1.702
PLR_/1700/___/D/O	DALI	39	4.725	1.708	42 x 1.702
<b>Powerline recessed 1.988 mm</b>					
PLR_/1980/___/ND/O	-	45,5	5.500	1.988	42 x 1.982
PLR_/1980/___/A/O	1-10 V	45,5	5.500	1.988	42 x 1.982
PLR_/1980/___/D/O	DALI	45,5	5.500	1.988	42 x 1.982
<b>Powerline recessed 2.268 mm</b>					
PLR_/2260/___/ND/O	-	52	6.300	2.268	42 x 2.262
PLR_/2260/___/A/O	1-10 V	52	6.300	2.268	42 x 2.262
PLR_/2260/___/D/O	DALI	52	6.300	2.268	42 x 2.262

# POWERLINE RECESSED

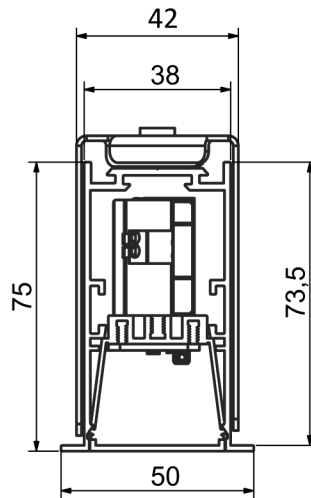

REFERENCE	DIM	POWER CONS (W)	LM OUTPUT (lm)	LENGTH (mm)	CUT-OUT (mm)
<b>Powerline recessed 2.548 mm</b>					
PLR_/2540/___/ND/O	-	58,5	7.080	2.548	42 x 2,542
PLR_/2540/___/A/O	1-10 V	58,5	7.080	2.548	42 x 2,542
PLR_/2540/___/D/O	DALI	58,5	7.080	2.548	42 x 2,542
<b>Powerline recessed 2.828 mm</b>					
PLR_/2820/___/ND/O	-	65	7.860	2.828	42 x 2,882
PL_/2820/___/A/O	1-10 V	65	7.860	2.828	42 x 2,882
PL_/2820/___/D/O	DALI	65	7.860	2.828	42 x 2,882
<b>Powerline recessed 3.108 mm</b>					
PLR_/3100/___/ND/O	-	71,5	8.660	3.108	42 x 3,102
PLR_/3100/___/A/O	1-10 V	71,5	8.660	3.108	42 x 3,102
PLR_/3100/___/D/O	DALI	71,5	8.660	3.108	42 x 3,102
<b>Powerline recessed 3.388 mm</b>					
PLR_/3380/___/ND/O	-	78	9.450	3.388	42 x 3,382
PLR_/3380/___/A/O	1-10 V	78	9.450	3.388	42 x 3,382
PLR_/3380/___/D/O	DALI	78	9.450	3.388	42 x 3,382
<b>Powerline recessed 3.668 mm</b>					
PLR_/3660/___/ND/O	-	83,5	10.240	3.668	42 x 3,662
PLR_/3660/___/A/O	1-10 V	83,5	10.240	3.668	42 x 3,662
PLR_/3660/___/D/O	DALI	83,5	10.240	3.668	42 x 3,662
<b>Powerline recessed 3.948 mm</b>					
PLR_/3940/___/ND/O	-	91	11025	3.948	42 x 3,942
PLR_/3940/___/A/O	1-10 V	91	11025	3.948	42 x 3,942
PLR_/3940/___/D/O	DALI	91	11025	3.948	42 x 3,942
<b>Powerline recessed 4.228 mm</b>					
PLR_/4220/___/ND/O	-	97,5	11.812	4.228	42 x 4,222
PLR_/4220/___/A/O	1-10 V	97,5	11.812	4.228	42 x 4,222
PLR_/4220/___/D/O	DALI	97,5	11.812	4.228	42 x 4,222
<b>Powerline recessed 4.508 mm</b>					
PLR_/4500/___/ND/O	-	104	12.600	4.508	42 x 4,502
PLR_/4500/___/A/O	1-10 V	104	12.600	4.508	42 x 4,502
PLR_/4500/___/D/O	DALI	104	12.600	4.508	42 x 4,502