


**90° RR Bend**

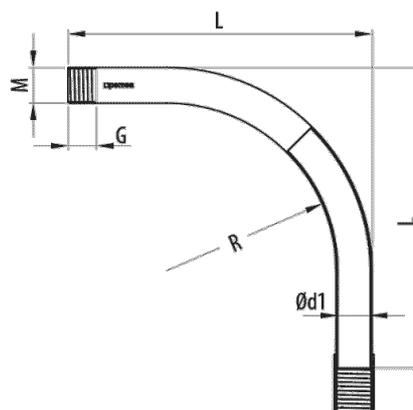

**Description**

90° threaded bend in electrogalvanised steel for the connection of RR conduits in installations that require high mechanical performance and medium resistance to corrosion. With an IP54 protection index. N mark of Aenor according to IEC 61386 standard. Available in different diameters.

**Advantages**

Threaded connection for joining RR conduits or accessories. Supplied complete with coupler.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in electrogalvanised steel (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

**Applications**

Suitable for the creation of 90° angles in installations of RR rigid metal threaded conduits in applications of building, tertiary sector and industrial with high requirements of hygiene. Premises of public attendance and premises with risk of fire or explosion.

**Solutions**



**90° RR Bend**

**Main technical characteristics**

E.G.	DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	M16, M20, M25, M32, M40, M50, M63	Steel with surface coating
4000	IP54	-45° / 400°	Halogen free Flame retardant
20			ETIM EC001493

**Product data**

DN					L <sub>mm</sub>	Ref	kg/u	
NW16	M16	15	13.6	97	173	55014016	0.155	10 u
NW20	M20	15	17.6	93	180	55014020	0.200	10 u
NW25	M25	20	22.6	117	198	55014025	0.297	10 u
NW32	M32	20	29.6	129	232	55014032	0.453	10 u
NW40	M40	20	37	145	287	55014040	0.841	5 u
NW50	M50	20	57	160	351	55014050	1.305	5 u
NW63	M63	20	60	296	541	55014063	2.292	3 u

**Coatings**

**PG/GS** - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

**EZ** - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

**BC** - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

**GC** - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

**BLACK C8** - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

**304 and 316L** stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Appropriate for outdoor installations and highly aggressive environments.

