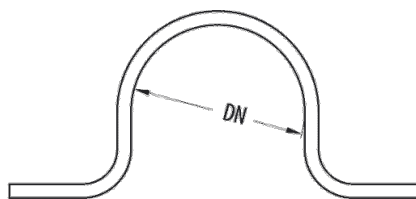
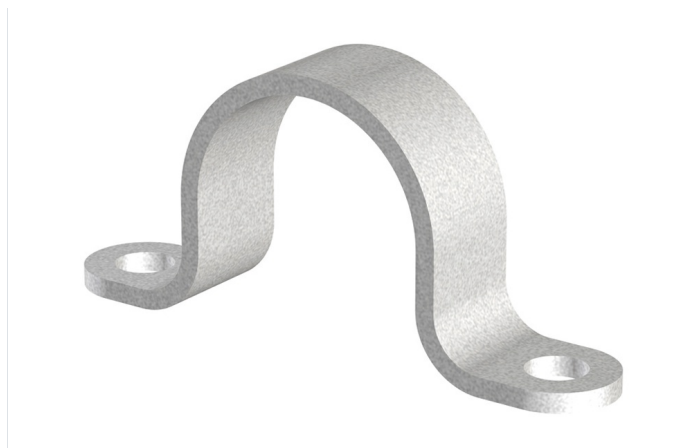


RGC Clamp**Description**

Hot dip galvanised steel clamp available in various diameters for fixing rigid metal conduits. Fixing to the wall with screws. Available in different diameters.

Advantages

Available in various sizes: NW16, NW20, NW25, NW32, NW40, NW50 and NW63.

Working temperature: -45°C to + 400°C.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in hot dip galvanised steel (standard EN ISO 1461), suitable for outdoor installations and in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for fixing RLGC and RRGC hot dip galvanised rigid metal conduits in installations that require high mechanical performance and high resistance to corrosion. For building applications. Tertiary and industrial sectors with high security requirements. Premises of public attendance or with risk of fire or explosion. Installation in outdoor and aggressive environments.

Solutions

RGC Clamp

Main technical characteristics

H.D.G.	DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	Steel with surface coating	-45° / 400°
Halogen free Flame retardant	ETIM EC000464		

Product data

DN	Ref	kg/u	
NW16	55032116	0.010	100 u
NW20	55032120	0.011	100 u
NW25	55032125	0.015	100 u
NW32	55032132	0.018	100 u
NW40	55032140	0.027	50 u
NW50	55032150	0.034	50 u
NW63	55032163	0.002	50 u

Coatings

PG/GS - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

EZ - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicron treatment. Appropriate for outdoor installations and highly aggressive environments.

