


TR Tee

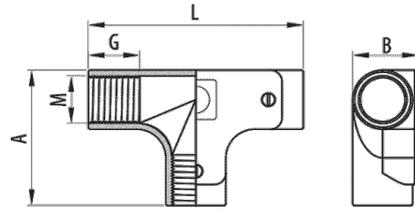

Description

Threaded Tee with removable cover for the connection of RR conduits in installations requiring high mechanical performance and an average resistance to corrosion. With an IP54 protection index. Accessory to create a branch in the conduit run. Made of aluminium and available in different diameters.

Advantages

Threaded connection system. Accessory to create branches in the routing of cable conduits.

Protection index EN 60529: IP54.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for the connection of RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



TR Tee

Main technical characteristics

Aluminium	DN NW16, NW20, NW25, NW32, NW40, NW50	M16, M20, M25, M32, M40, M50	Aluminium	IP54
-45° / 400°	Halogen free Flame retardant	ETIM EC002922		

Product data

DN			L _{mm}	A _{mm}	B _{mm}	Ref	kg/u	
NW16	M16	20	96	61	30.5	55080016	0.127	10 u
NW20	M20	21.5	96	61	30.5	55080020	0.112	10 u
NW25	M25	26.5	111	71	35.5	55080025	0.221	8 u
NW32	M32	32	146	96	51.5	55080032	0.423	2 u
NW40	M40	33.5	146	96	51.5	55080040	0.688	2 u
NW50	M50	43.5	183	120	61.5	55080050	1.155	1 u

Coatings

PG/GS - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

EZ - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Appropriate for outdoor installations and highly aggressive environments.

