


PIXO LARGE FOOD MEAT MB WHITE

Artikelnummer 0004590

SYLVANIA


PRO

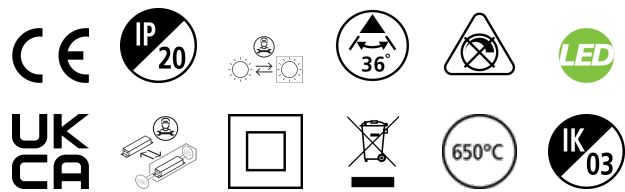

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for MEAT applications improves the presentation of butcher's counter, the special light spectrum makes the appearance of meats and cured meats more succulent and appetizing Die-cast aluminium body, Beam angle: 36° Textured white finishing colour Light color temperature: 3000K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 2850lm, efficacy: 71lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm 5 years warranty

Technische activa

Afmetingen (mm)

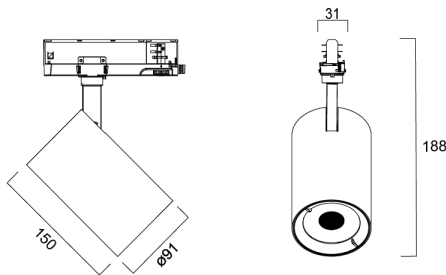

Fotometrie

PIXO LARGE FOOD MEAT MB WHITE

Artikelnummer 0004590



General data

Productnaam	PIXO LARGE FOOD MEAT MB WHITE
Technologie	LED
Lampvoet	N/A
Behuizing	Aluminium
Montage	Railmontage
Algemene toepassing	Musea & Galeries, Retail, Kantoor, Residentieel & Consument
Omgevingstemperatuur (°C)	25°C...+25°C
ETIM klasse	EC001744
Garantie	5 jaar

Optical data

Lichtstroom	2850
Lumenstroom armatuur (lm)	2850
Efficiëntie armatuur lm/W	71
Kleurtemperatuur (K)	3000
Lichtkleur	Niet van toepassing
CRI (Ra)	70
Initiële kleurvariatie (SDCM)	SDCM4
Bundel breedte (°)	36
Type licht distributie	Symmetric
Photobiological Risk Group	RG1

Electrical data

Totaal energieverbruik (W)	40
Stroom (A)	0.17
Primaire voedingsspanning min	220.0
Primaire voedingsspanning max	240.0
Lamp arbeidsfactor	0.9
THD (bij 230 V, 50 Hz, volledige belasting, bij 100% dimniveau) ≤ xx.x %	15
Elektrische beschermingsklasse	Klasse II
Type ballast	LED constante stroom driver
Dimbaar	Neen
Dimtechnologie	N/A
Inschakelstroom (A)	48
Duur inschakelstroom (µs)	4
Energie-efficiëntieklasse (A->G) van de lichtbron in dit product	F
Nominale frequentie (Hz)	50/60Hz
Max. Armaturen per 10A C automaat	24
Max. Armaturen per 13A C automaat	26
Max. Armaturen per 16A C automaat	32
Max. Armaturen per 20A C automaat	40
Max. Armaturen per 10A B automaat	15
Max. Armaturen per 13A B automaat	16
Max. Armaturen per 16A B automaat	20
Max. Armaturen per 20A B automaat	25

Lifetime data

Gemiddelde nominale levensduur - L70 B50	100000
Gemiddelde nominale levensduur - L80 B50	85000
Gemiddelde nominale levensduur - L90 B50	41000

PIXO LARGE FOOD MEAT MB WHITE

Artikelnummer 0004590



Physical data

Kleur behuizing	Wit
IP waarde	IP20
IK waarde	IK03
Afwerking diffusor	Overige
Materiaal diffusor	Geen
Afwerking reflector	Hoogglans
Lengte (mm)	150
Nominale diameter product (mm)	91
Gewicht (kg)	0.74

Packaging

EAN code	5410288045900
Enkele lengte verpakking (cm)	21.5
Enkele breedte verpakking (cm)	12.7
Hoogte eenheidsverpakking (cm)	22.3
DUN14 (inner)	15410288045907
Eenheden per omdoos	8
Lengte omdoos (cm)	53.0
Breedte omdoos (cm)	44.5
Diepte omdoos (cm)	25.0

Safety data

Gloeidraad test (°)	650
Optimale bedrijfsomstandigheden (°C)	25-25