


# PIXO LINE 1500 90D BEAM 840 WHITE

Artikelnummer 0007820




PRO

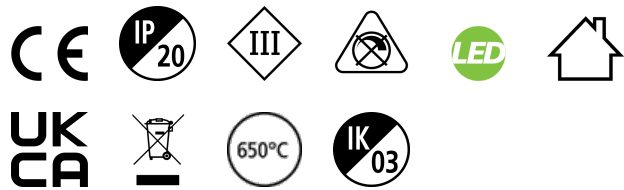


Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90° Textured white finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx37mm

## Technische activa

### Afmetingen (mm)

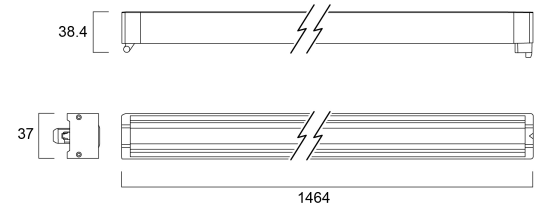

### Fotometrie





# PIXO LINE 1500 90D BEAM 840 WHITE

Artikelnummer 0007820



## Physical data

Kleur behuizing	Wit
IP waarde	IP20
IK waarde	IK03
Lengte (mm)	1464
Breedte (mm)	37
Hoogte (mm)	38.4
Gewicht (kg)	0.9

## Packaging

EAN code	5410288078205
Enkele lengte verpakking (cm)	147.0
Enkele breedte verpakking (cm)	4.3
Hoogte eenheidsverpakking (cm)	4.3
DUN14 (inner)	15410288078202
Eenheden per omdoos	10
Lengte omdoos (cm)	149.0
Breedte omdoos (cm)	24.0
Diepte omdoos (cm)	11.0

## Safety data

Gloeidraad test (°)	650
Optimale bedrijfsomstandigheden (°C)	-20-40