


OTAO LINEAR 1.2 PRIS 830/840 MP BK

Artikelnummer 0040802




PRO

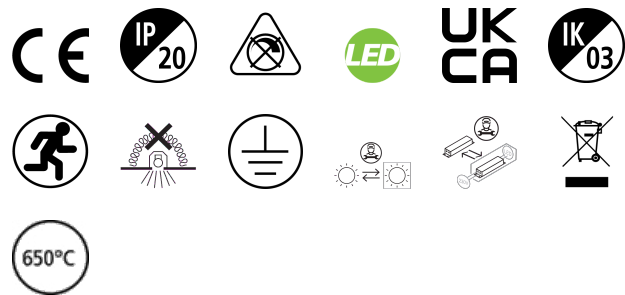


Linear LED Luminaire, RAL9011 (black) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses with prismatic diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip swith in direct mode (22-24W), max system power: 24W, max fixture output: 3350lm @ 4000K CCT, efficacy at max output 140lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 135lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Technische activa

Afmetingen (mm)

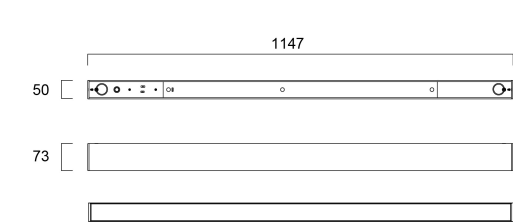

Fotometrie



OTAO LINEAR 1.2 PRIS 830/840 MP BK

Artikelnummer 0040802



Physical data

Kleur behuizing	RAL 9011 - Graphite black
IP waarde	IP20
IK waarde	IK03
Afwerking diffusor	Transparant
Materiaal diffusor	PC Polycarbonaat
Lengte (mm)	1147
Breedte (mm)	50
Hoogte (mm)	73
Gewicht (kg)	1.75

Packaging

EAN code	5410288408026
Enkele lengte verpakking (cm)	122.0
Enkele breedte verpakking (cm)	6.1
Hoogte eenheidsverpakking (cm)	7.8
DUN14 (inner)	15410288408023
Eenheden per omdoos	4
Lengte omdoos (cm)	124.0
Breedte omdoos (cm)	14.2
Diepte omdoos (cm)	19.4

Safety data

Gloeidraad test (°)	650
Optimale bedrijfsomstandigheden (°C)	5-50