

OTAO LINEAR 1.2 REF BLK 830/840 DALI BK

Artikelnummer 0040824




PRO




Linear LED Luminaire, RAL9011 (black) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses combined with black painted reflector, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), DALI driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip swith in direct mode (22-24W), max system power: 24W, max fixture output: 3350lm @ 4000K CCT, efficacy at max output 140lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 4900lm @ 4000K CCT, efficacy at max output 136lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Technische activa

Afmetingen (mm)

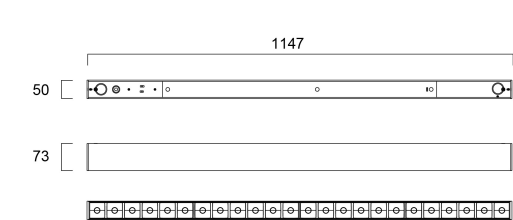

Fotometrie

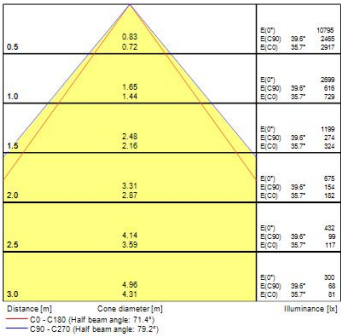

OTAO LINEAR 1.2 REF BLK 830/840 DALI BK

Artikelnummer 0040824



Physical data

| | |
|---------------------|---------------------------|
| Kleur behuizing | RAL 9011 - Graphite black |
| IP waarde | IP20 |
| IK waarde | IK03 |
| Afwerking diffusor | Overige |
| Materiaal diffusor | Overige |
| Afwerking reflector | Not Applicable |
| Lengte (mm) | 1147 |
| Breedte (mm) | 50 |
| Hoogte (mm) | 73 |
| Gewicht (kg) | 1.9 |

Packaging

| | |
|--------------------------------|----------------|
| EAN code | 5410288408248 |
| Enkele lengte verpakking (cm) | 122.0 |
| Enkele breedte verpakking (cm) | 6.1 |
| Hoogte eenheidsverpakking (cm) | 7.8 |
| DUN14 (inner) | 15410288408245 |
| Eenheden per omdoos | 4 |
| Lengte omdoos (cm) | 122.0 |
| Breedte omdoos (cm) | 14.2 |
| Diepte omdoos (cm) | 19.4 |

Safety data

| | |
|--------------------------------------|------|
| Gloeidraad test (°) | 650 |
| Optimale bedrijfsomstandigheden (°C) | 5-50 |