




SylSafe Exit-Mod EX R EM3 MT DA is a recessed emergency exit sign. Comes with ISO7010 compliant legend pack. Arrows left, right, up, down and a blank sheet for single sided versions. EC legend pack is available as accessory. Viewing distance 26m. White housing colour. Maintained 3hr emergency operation with NiMH rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. 4.9W, IK03, IP20. Power Factor 0.49. Class II electrical construction.

Technische activa

Afmetingen (mm)

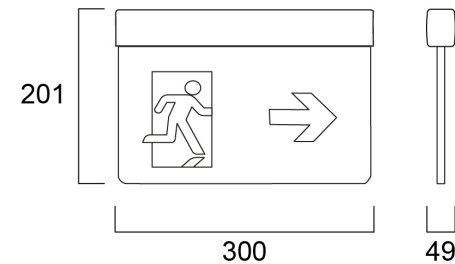

Fotometrie

General data

Productnaam	SylSafe Exit-Mod EX R EM3 MT DA
Technologie	LED
Montage	Plafondinbouw
Algemene toepassing	Kantoor, Horeca, Retail, Musea & Galeries, Onderwijs, Logistiek & Industrie
ETIM klasse	EC001957
Garantie	5 jaar

Optical data

Lumenstroom armatuur (lm)	-
Nood duur (u)	3

Electrical data

Primaire voedingsspanning min	220
Primaire voedingsspanning max	240
Lamp arbeidsfactor	0.49
Elektrische beschermingsklasse	Klasse II
Voorschakelapparaat vereist	Ja
Stuurstroom driver (mA)	60
Nominale frequentie (Hz)	50/60Hz

Physical data

Kleur behuizing	Wit
IP waarde	IP20
IK waarde	IK03
Lengte (mm)	300
Breedte (mm)	49
Hoogte (mm)	201
Gewicht (kg)	0.866

Packaging

EAN code	5410288417509
Enkele lengte verpakking (cm)	31.0
Enkele breedte verpakking (cm)	22.6
Hoogte eenheidsverpakking (cm)	4.4
DUN14 (inner)	05410288417509
Eenheden per omdoos	1
Lengte omdoos (cm)	31.0
Breedte omdoos (cm)	22.6
Diepte omdoos (cm)	4.4