



QUADRO 600x600 830 MP

Artikelnummer 0044700

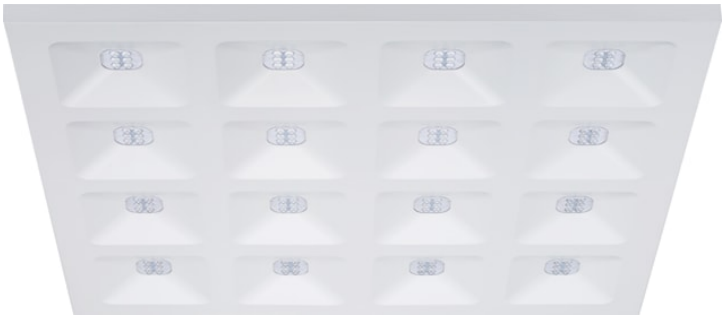


PRO

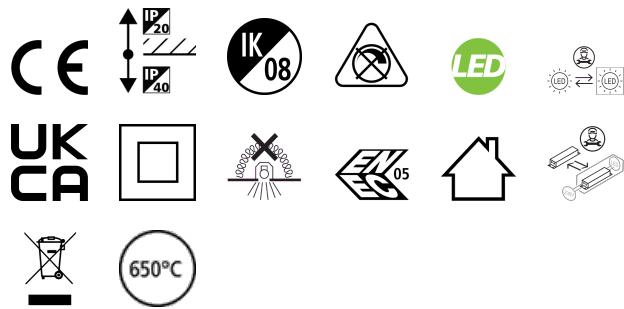


QUADRO 600x600 830 MP Unique stylish recessed modular LED luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75° beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K (Warm White), max system power: 34W, max fixture output: 4500lm, efficacy at max output 132lm/W, max efficacy 140lm/W @ 15W, CRi (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 88,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non-dimmable 8-step SELV Multipower driver (15W 2100lm, 18W 2500lm, 21W 2950lm, 24W 3300lm, 27W 3650lm, 30W 3950lm, 32W 4250lm, 34W 4500lm), electrical protection: Class II. Ingress protection IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 3,20kg.

Technische activa

Afmetingen (mm)

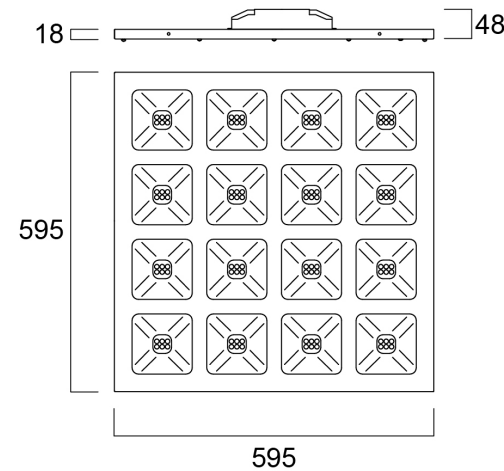

Fotometrie

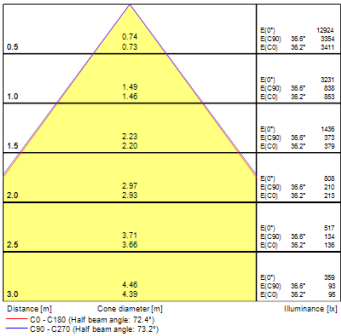

QUADRO 600x600 830 MP

Artikelnummer 0044700



| | |
|-------------------------------------|-----|
| Max. Armaturen per 20A B automaat | 41 |
| Aansluitbare geleider doorsnede max | 1.5 |

Physical data

| | |
|--------------------|-------------------------|
| Kleur behuizing | RAL 9003 - Signal white |
| IP waarde | IP40/20 |
| IK waarde | IK08 |
| Afwerking diffusor | Overige |
| Materiaal diffusor | Geen |
| Lengte (mm) | 595 |
| Breedte (mm) | 595 |
| Hoogte (mm) | 18 |
| Gewicht (kg) | 2.669 |

Packaging

| | |
|--------------------------------|----------------|
| EAN code | 5410288447001 |
| Enkele lengte verpakking (cm) | 60.0 |
| Enkele breedte verpakking (cm) | 3.0 |
| Hoogte eenheidsverpakking (cm) | 66.0 |
| DUN14 (inner) | 15410288447008 |
| Eenheden per omdoos | 48 |
| Lengte omdoos (cm) | 122.0 |
| Breedte omdoos (cm) | 81.0 |
| Diepte omdoos (cm) | 67.5 |

Safety data

| | |
|--------------------------------------|--------|
| Gloeidraad test (°) | 650 |
| Optimale bedrijfsomstandigheden (°C) | -10-45 |