


## Cedrus Quantum (Flex)

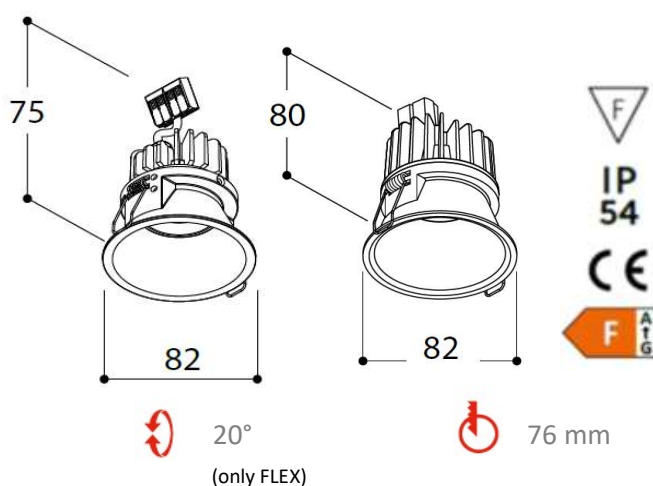

### Luminaire specifications

|                    |                           |
|--------------------|---------------------------|
| Material           | Aluminium housing         |
| IP rating          | IP 54                     |
| Use                | Indoor - Ceiling recessed |
| Cut-out            | Ø 76mm                    |
| installation depth | Height + 5mm              |
| Weight             | 200gr                     |

### Electrical

|                      |                   |
|----------------------|-------------------|
| Driver               | Remote            |
| Dimmable             | Depends on driver |
| Connection           | 350mA DC serial   |
| Voltage Forward (VF) | 17,7V             |

### Features

- \* Energy saving - high luminaire output
- \* Available in :
  - Textured Black Powder coated
  - Textured white Powder coated
  - Bronze antique
- \* Leaf or Torsion installation possible
- \* Mains, 1-10V, DALI & Casambi dimming possible
- \* LED lifespan 50.000 hours @L80B10
- \* SDCM = 3
- \* 5 years warranty

### Light source

|                   |           |        |
|-------------------|-----------|--------|
| Type              | Bridgelux |        |
| Power max         | 6,2W      |        |
| CRI               | 90        |        |
| Color Temperature | 2700K     | 3000K  |
| LED output        | 600 lm    | 622 lm |
| LUMINAIRE output  | 495 lm    | 510 lm |
| LUMEN per Watt    | 97        | 100    |

### Optics

|               |                   |
|---------------|-------------------|
| Material      | PMMA              |
| Beam angle    | 24° - 36° - 60°   |
| Adjustability | 20° ( only FLEX ) |

### Accessories

|           |                   |
|-----------|-------------------|
| Box/Frame | Frame for plaster |
| Honeycomb | Not applicable    |

### Photometric data

