
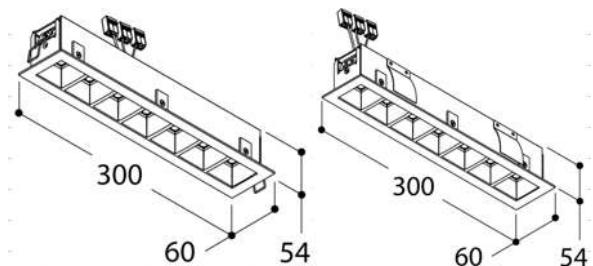


Pixl7 recessed

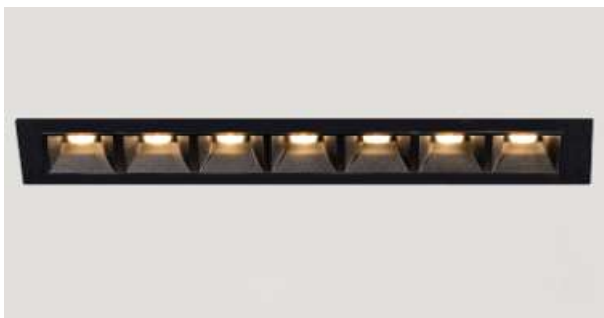

Luminaire specifications

Material	Aluminium
IP rating	IP 20
Use	Indoor - ceiling
Cut-out	52 x 290mm
Installation depth	60mm
Weight	330gr

Electrical

Driver	Incorporated
Dimmable	Mains dimmable RC
Connection	230V 50-60Hz AC
Dali	On request

Features

- * Energy saving: very high efficiency >140 lm/W
- * Available in 4- or 7-module version
- * Surface mounted or recessed
 - Recessed: Torsion or leaf springs
- * 230V power supply, converter incorporated
- * Mains dimmable & Dali dimmable possible
- * Available in :
 - Textured Black Powder coated
 - Textured white Powder coated
 - Any other color on request
- * Part of the quick ship family
- * Lighting lifespan 50.000h@L80B10
- * 5 years warranty

Light source

Type	Ledarray L278	
Power max	13,93W	
CRI	90	
Color Temperature (CCT)	2700K	3000K
LED output	1982 lm	2081 lm
LUMINAIRE output	1784 lm	1873 lm

Optics

UGR	< 19
Beam angle	50° - 80°
Adjustability	No

Accessories

Installation set	Frame + box for plaster
	Frame for plaster

Photometric data

