


## Pixl4 ceiling mounted

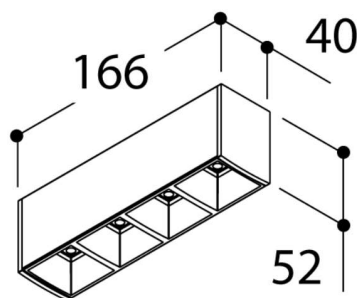

### Luminaire specifications

Material	Aluminium
IP rating	IP 20
Use	Indoor - ceiling
Cut-out	Surface mounted
Installation depth	Not applicable
Weight	270gr

### Electrical

Driver	Incorporated
Dimmable	Mains dimmable RC
Connection	230V 50-60Hz AC
Dali	On request

### Features

- \* Energy saving: very high efficiency >140 lm/W
- \* Available in 4- or 7-module version
- \* Surface mounted or recessed
  - Recessed: Torsion or leaf springs
- \* 230V power supply, converter incorporated
- \* Mains dimmable & Dali dimmable possible
- \* Available in :
  - Textured Black Powder coated
  - Textured white Powder coated
  - Any other color on request
- \* Part of the quick ship family
- \* Lighting lifespan 50.000h@L80B10
- \* 5 years warranty

### Light source

Type	Ledarray L139	
Power max	7,92W	
CRI	90	
Color Temperature (CCT)	2700K	3000K
LED output	1118 lm	1174 lm
LUMINAIRE output	1006 lm	1057 lm

### Optics

UGR	< 19
Beam angle	50° - 80°
Adjustability	No

### Photometric data

