


Fonda

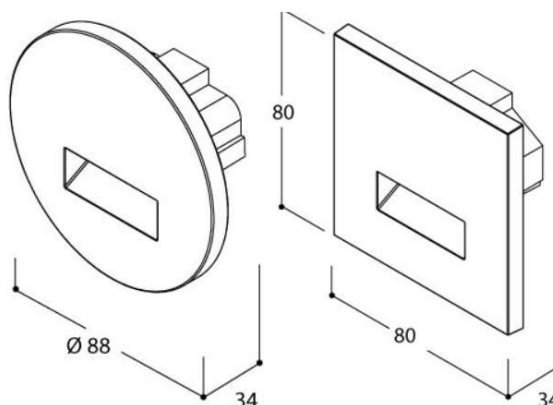

Luminaire specifications

Material	Injection moulded housing Aluminium frame
IP rating	IP 20
Use	Indoor - wall
Hole cut-out	Wallbox R or SQ
installation depth	50mm
Weight	200gr

Light source

Type	SMD Led	
Power max	0,8W	
CRI	80	
Color Temperature (CCT)	2700K	3000K
LED output	60 lm	60 lm
LUMINAIRE output	30 lm	30 lm

Electrical

Driver	Incorporated
Dimmable	NOT dimmable
Connection	230V 50-60Hz AC
Voltage Forward (VF)	NA

Optics

Material	NA
Beam angle	NA
Beam direction	Asymmetrical

Accessories

Elite Clamp set	145900
-----------------	--------

Features

- * Available in round or square version
- * Recessed installation
- * 230V power supply, converter incorporated
- * Available in :
 - Textured Black Powder coated
 - Textured White Powder coated
 - Brushed Alu
- * Part of the quick ship family
- * Lighting lifespan 50.000h@L80B10

Photometric data

