


Spyke

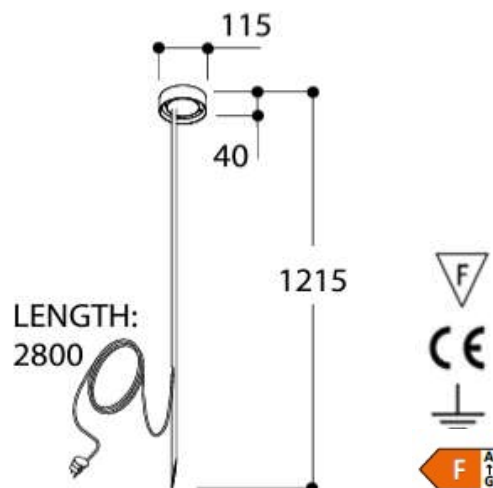

Luminaire specifications

Material	Aluminium
IP rating	IP 65
Use	Outdoor
Cut-out	Not applicable
installation depth	Not applicable
Weight	1,1 kg

Electrical

Driver	Incorporated
Dimmable	Mains dimmable RC
Connection	230V 50-60Hz AC
Dali	Not applicable

Features

- * Energy saving - high luminaire output
- * 230V power supply, converter incorporated
- * Available in :
 - Textured Black Powder coated
 - Textured Grey Powder coated
 - Moss Green Powder coated
 - Silver Anthracite Powder coated
- * Cable and plug attached
- * LED lifespan 50.000 hours L80
- * 5 years warranty

Light source

Type	Annular LED array	
Power max	7,8W	
CRI	92	
Color Temperature (CCT)	2700K	3000K
LED output	780 lm	794 lm
LUMINAIRE output	624 lm	635 lm

Optics

UGR	Not applicable
Beam angle	Lambertian

Photometric data

* Soon to come