

# Lampholders and Accessories for T Lamps

G13 push-through lampholders for lamps T8 and T12  
Lamp axis: 31 mm

Casing: PC, white, rotor: PBT, white

T130, nominal rating: 2/500

Push-in terminals: 0.5–1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.6–2 mm

Weight: 9.9 g, unit: 1000 pcs.

Type: 28500/28501

**Ref. No.: 100591** with stop

**Ref. No.: 100593** without stop

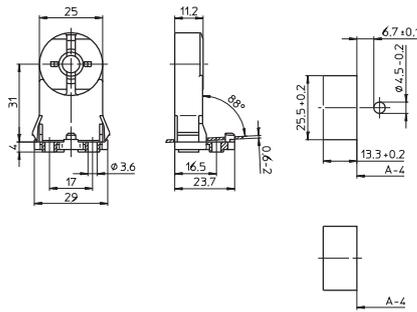

1

2

3

## G13 Push-fit Lampholders

### For fluorescent lamps T8 (T26), T12 (T38)

Lampholders with integrated starter holder are equipped with big rotor and have push-in twin terminals for the lamp circuit and push-in terminals for the starter circuit. Pin support for reliable contact

Casing: PC, white, frontplate/rotor: PBT GF, white

Max. permitted temperature  $T_m$

on the rear side of the lampholder: 110 °C

T-Marking acc. to IEC

IP50 version: push-fit foot with gasket

G13 Rotoclic push-fit lampholders for lamps T8 and T12

T140, nominal rating: 2/500, suitable for Top Test

Lateral push-in terminals: 0.5–1 mm<sup>2</sup>

Push-fit foot for luminaire cut-out 13.3x25.5 mm with wall thickness 0.6–1 mm

Lampholder foot/luminaire: IP40 (537135: IP50)

Weight: 5.9/5.9/6/6 g, unit: 1000 pcs.


Type: 24100/24110/24170/24150

**Ref. No.: 537132** lamp axis H: 25 mm

**Ref. No.: 537135** lamp axis H: 25 mm, IP50

**Ref. No.: 537150** lamp axis H: 21 mm

**Ref. No.: 537144** lamp axis H: 18 mm

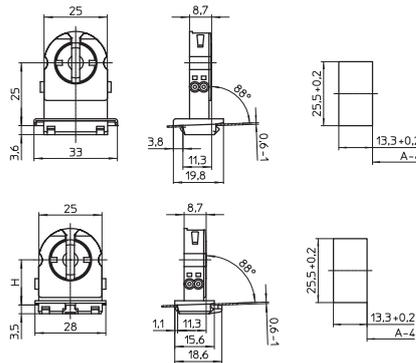

5

6

G13 Rotoclic push-fit lampholders for lamps T8 and T12

T140, nominal rating: 2/500, suitable for Top Test

Lateral push-in terminals: 0.5–1 mm<sup>2</sup>

Push-fit foot for luminaire cut-out 10x20 mm with wall thickness 0.6–1 mm


Lampholder foot/luminaire: IP40

Weight: 5.7/6 g, unit: 1000 pcs.

Type: 24120/24160

**Ref. No.: 537138** lamp axis H: 25 mm

**Ref. No.: 537147** lamp axis H: 21 mm

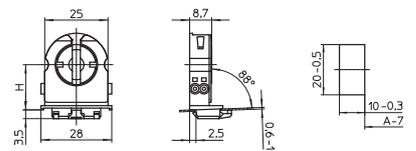

7

8

G13 Rotoclic push-fit lampholders for lamps T8

T140, nominal rating: 2/500

Base push-in terminals: 0.5–1 mm<sup>2</sup>

Base split pins for wall thickness up to 1.2 mm


Lampholder foot/luminaire: IP40

Weight: 5.9/5.7 g, unit: 1000 pcs.

Type: 24360/24350

**Ref. No.: 537155** lamp axis H: 30 mm

**Ref. No.: 537153** lamp axis H: 23.5 mm

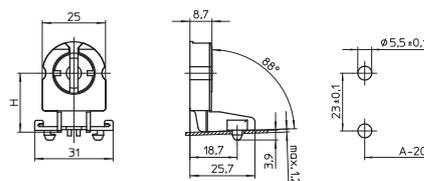

9

10