

EasyLine 12 V C-L

Product features

- Linear casing shape
- For use in applications with medium and high capacity range from 60 to 100 W

Electrical features


- Mains voltage: 220–240 V $\pm 10\%$
(allowed voltage range: 198–264 V)
- Mains frequency: 50–60 Hz
- Screw terminals: 0.75–1.5 mm²
- Power factor at full load: > 0.9 C

Safety features

- Protection against transient main peaks
- Electronic short-circuit protection
- Overload protection: reversible
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV


Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186621	20	100	305
186622	20	100	350
186623	20	70	400

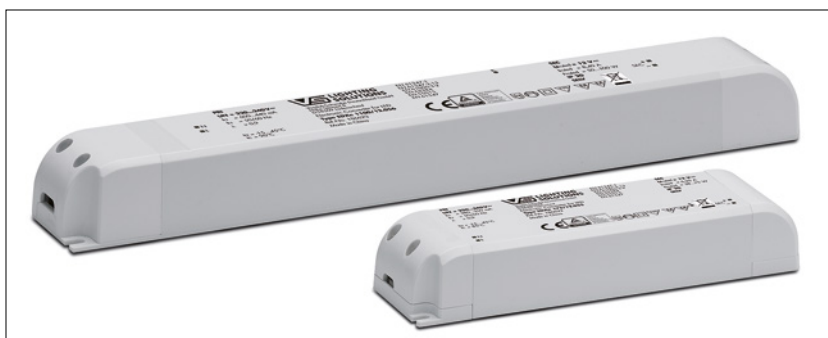

Dimensions

- Casing: K55.1
- Ref. No.: 186621, 186622
- Length: 180 mm
- Width: 52 mm
- Height: 30 mm

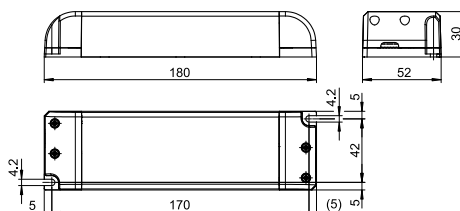


Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015



- Casing: K60
- Ref. No.: 186623
- Length: 300 mm
- Width: 40 mm
- Height: 30 mm

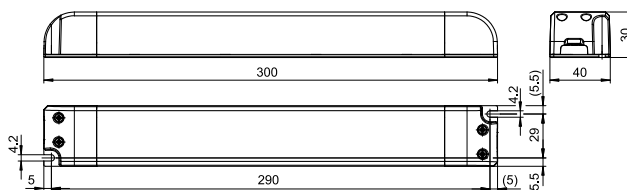

Product guarantee

- 5 years
for operation at recommended operation temperature (see table for expected service life time on page 3)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.