

## EasyLine 24 V C-L

### Product features

- Compact casing shape
- For use in applications with medium and high capacity range of up to 60, 75, 120 and 180 W

### Electrical features

- Mains voltage: 220–240 V  $\pm 10\%$   
(allowed voltage range: 198–264 V)
- Mains frequency: 50–60 Hz
- Screw terminals: 0.75–1.5 mm<sup>2</sup> or 0.5–1.5 mm<sup>2</sup> (186717)
- Power factor at full load: > 0.95 C

### Safety features

- Protection against transient main peaks
- Electronic short-circuit protection
- Overload protection: reversible
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV

### Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186625	20	100	350
186626	20	100	350
186627	20	70	425
186717	17	77	665


### Product guarantee

- 5 years for operation at recommended operation temperature (see table for expected service life time on next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)). We will be happy to send you these conditions upon request.



### Dimensions

- Casing: K55.1
- Ref. No.: 186625, 186626
- Length: 180 mm
- Width: 52 mm
- Height: 30 mm

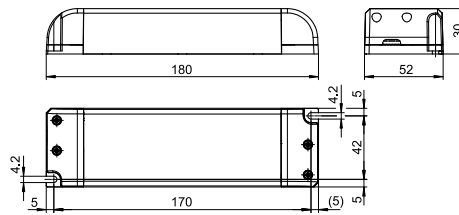

### Applied standards


- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015




186625, 186626, 186627



- Casing: K60
- Ref. No.: 186627
- Length: 300 mm
- Width: 40 mm
- Height: 30 mm

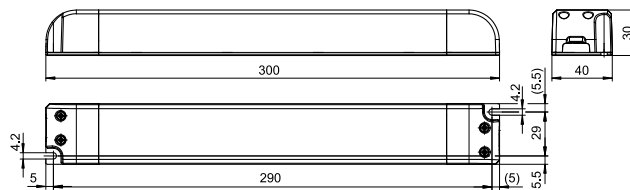

- Casing: K61
- Ref. No.: 186717
- Length: 345 mm
- Width: 50 mm
- Height: 35 mm

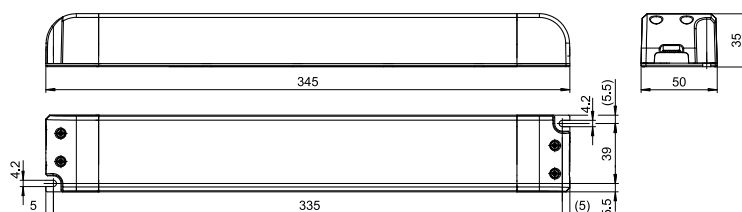

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.