

ELXc – Warm Start for T5 and T8 Lamps

Electronic built-in ballasts

Casing: metal

Power factor: ≥ 0.95

RFI-suppressed

For luminaires of protection class I


Degree of protection: IP20

For lighting systems with


high switching frequency ($> 5/\text{day}$)



M6

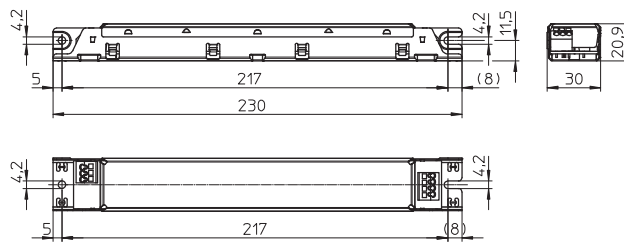

M8

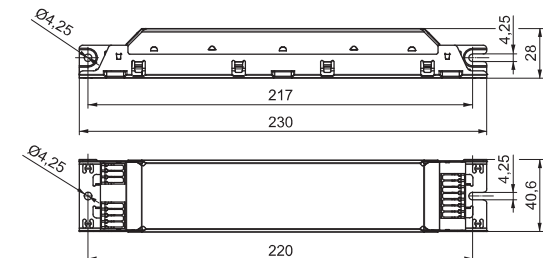

M10/M11

