



NAME	COSMOPOLITAN ROUND / SQUARE WALL MOUNTED 24V		
REFERENCE	124026	ROUND TEXT. BLACK	2700K
	124047	ROUND TEXT. WHITE	2700K
	124006	ROUND BRUSHED BRASS	2700K
	124017	ROUND BRONZE ANTIQUE	2700K
	124029	ROUND COPPER	2700K
	124226	SQUARE TEXT. BLACK	2700K
	124247	SQUARE TEXT. WHITE	2700K
	124206	SQUARE BRUSHED BRASS	2700K
	124217	SQUARE BRONZE ANTIQUE	2700K
	124229	SQUARE COPPER	2700K



SPECIFICATIONS	Lamptype	LP COB LEDSTRING
	Symbol	
	CCT	2700K
	Luminous flux	631lm
	Power	6W
	Voltage	24V DC
	CRI	90
	SDCM	3
	Beamangle	lambertian
	Orientability	not orientable
	Gear	converter not incorporated
	Dimmability	PWM dimmable
	Safe distance to object	- 0,1m
	Class / IP	IP20
	Application	interior - wall mounted
	Installation cut out / depth	see scenario A to C
	Weight	1,8 kg
	Energy class	F

*Cleaning



Use a slightly damp microfibre cloth.



Never use abrasive sponges, abrasives & polishing powders.



Never use masking tape to protect the cover plate or the frame when painting. We recommend to fully disassemble the devices.




Never use stubborn chemical and alcoholic cleaning agents. These will damage the protective layer.

ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING "ON" LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES!

INSTALLATION

A. Direct surface mounted on hollow wall:


① Drill hole Ø42mm and make drillpattern

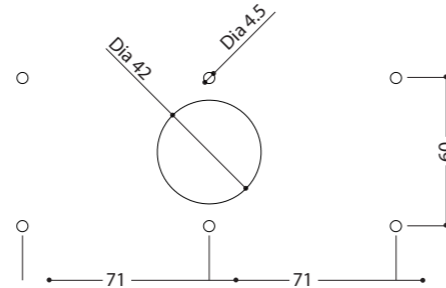



MINIMUM INSTALLATION
DEPTH = 40mm

USE AT LEAST TWO SCREW POINTS
FOR FIXING, PLEASE CONSIDER
HORIZONTAL OR VERTICAL
FRONT LIGHT POSITION BEFORE
MAKING THE DRILLPATTERN


② Mount the baseframe

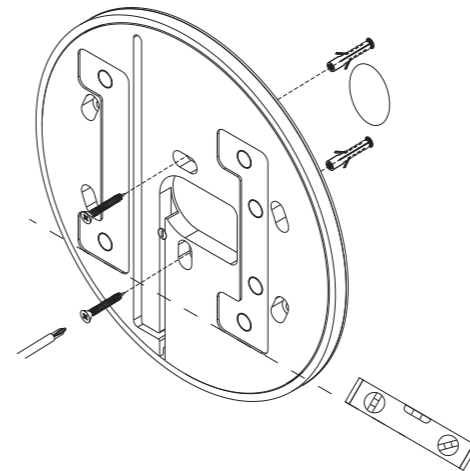


③ Make electrical connection

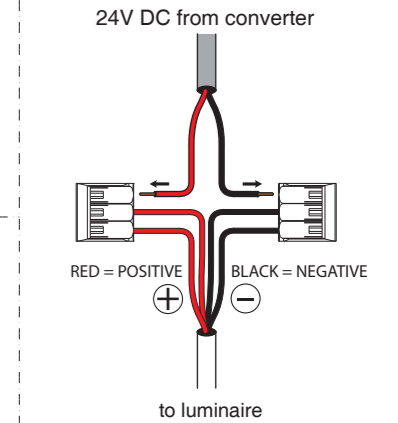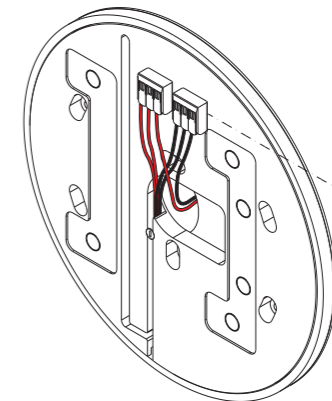



④ Attach the left coverplate

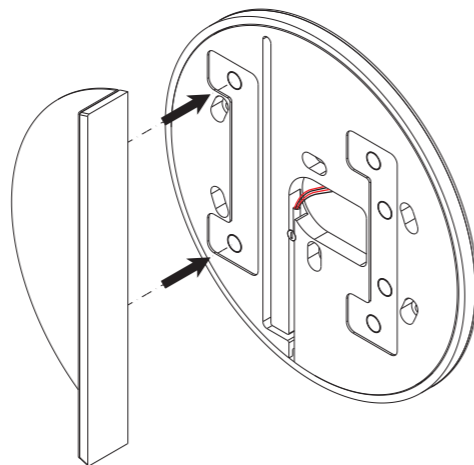


⑤ Attach the right coverplate

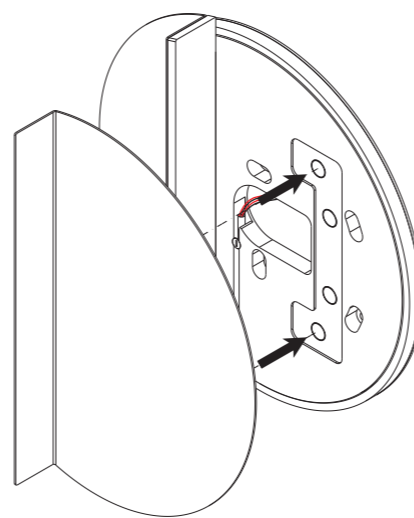

PLEASE MAKE SURE THE ORIENTATION PLATE
WHICH IS MOUNTED ON THE COVERPLATE IS
PROPERLY FIXED AND LOCATED IN THE PROVIDED
BASEFRAME SLOT, PLEASE CHECK AFTER INSTALLING

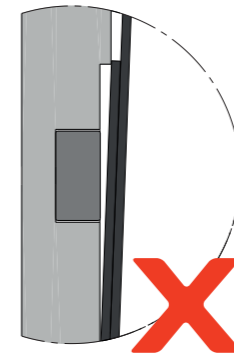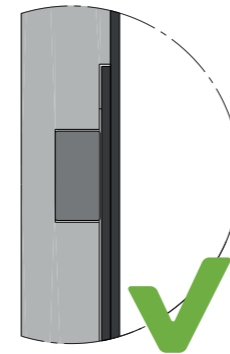


⑥ Switch on mains power supply

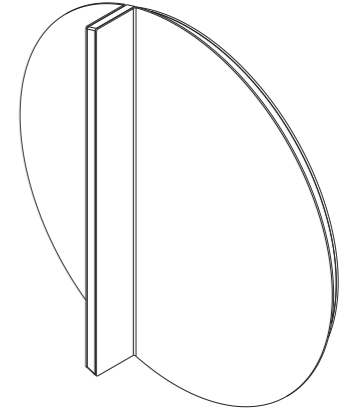

B. Recessed mounted on hollow / solid wall using electrical accessory box:


① Install recessed wall box

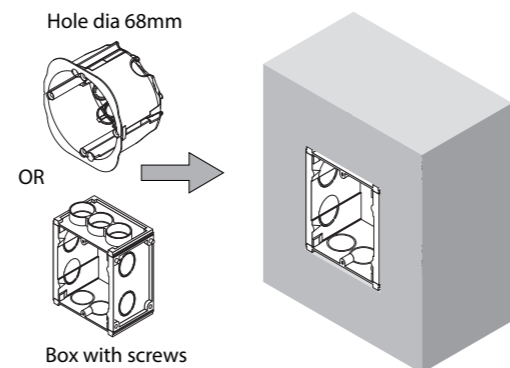



COSMOPOLITAN IS COMPATIBLE
WITH SINGLE, DOUBLE OR TRIPLE
DEVICE WALL BOXES

USE AT LEAST TWO SCREW POINTS
FOR FIXING, PLEASE CONSIDER
HORIZONTAL OR VERTICAL
FRONT LIGHT POSITION BEFORE
INSTALLING THE WALL BOX

② Mount the baseframe

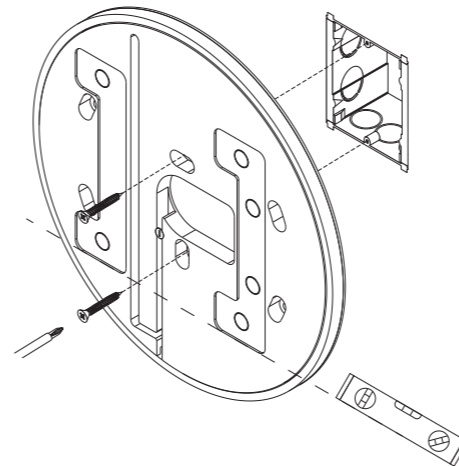


③ Make electrical connection

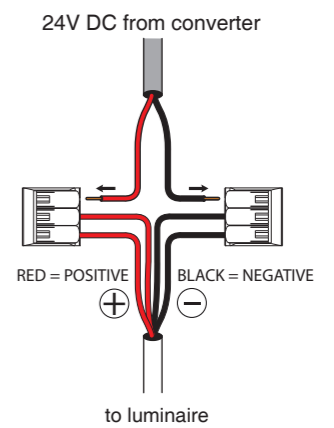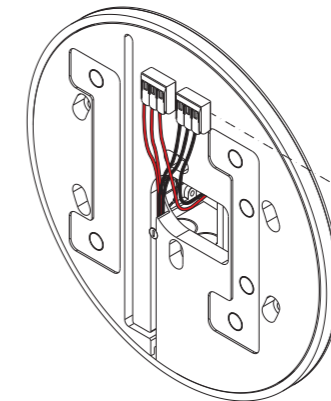


SEE NEXT STEPS ON VERSO PAGE





④ Attach the left coverplate

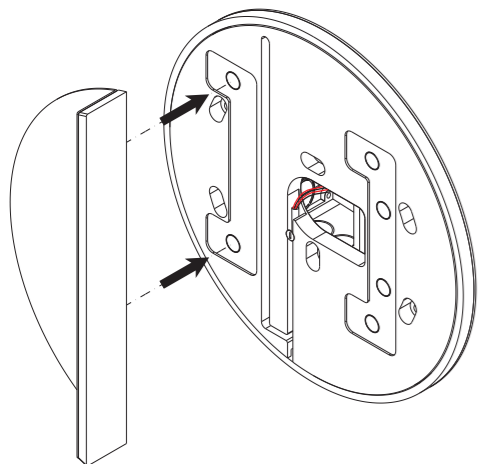


⑤ Attach the right coverplate

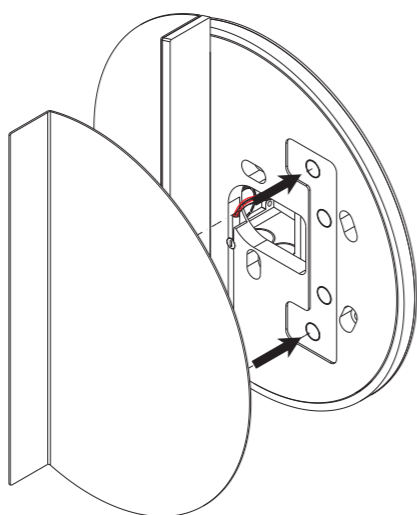

PLEASE MAKE SURE THE ORIENTATION PLATE WHICH IS MOUNTED ON THE COVERPLATE IS PROPERLY FIXED AND LOCATED IN THE PROVIDED BASEFRAME SLOT, PLEASE CHECK AFTER INSTALLING

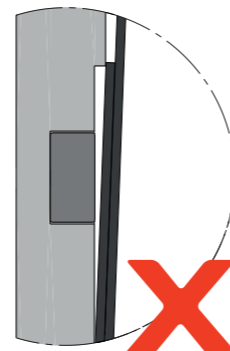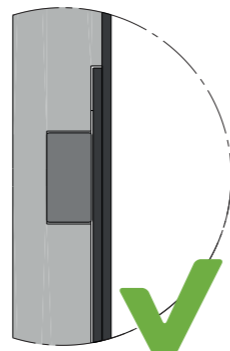


⑥ Switch on mains power supply

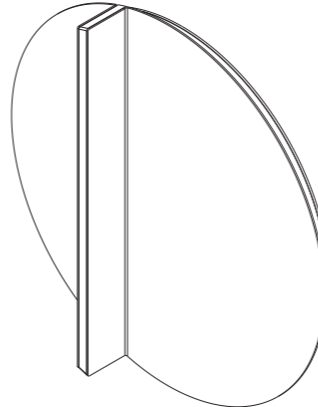

C. Direct surface mounted on solid wall:


① Drill hole Ø42mm and make drillpattern

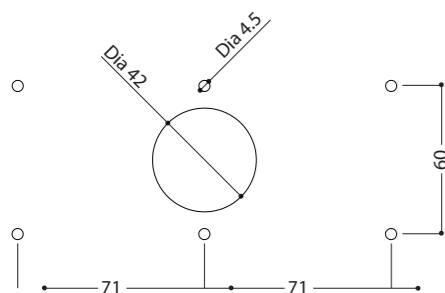



MINIMUM INSTALLATION DEPTH = 40mm

USE AT LEAST TWO SCREW POINTS FOR FIXING, PLEASE CONSIDER HORIZONTAL OR VERTICAL FRONT LIGHT POSITION BEFORE MAKING THE DRILLPATTERN


② Mount the baseframe

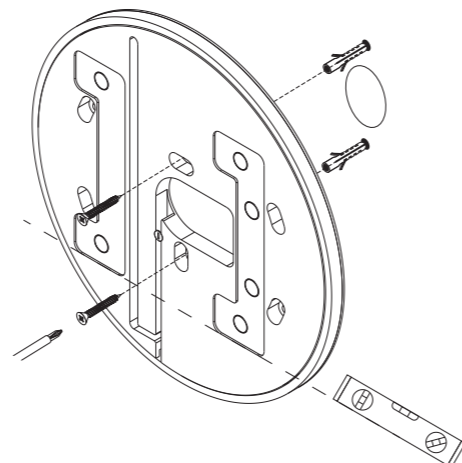

③ Make electrical connection

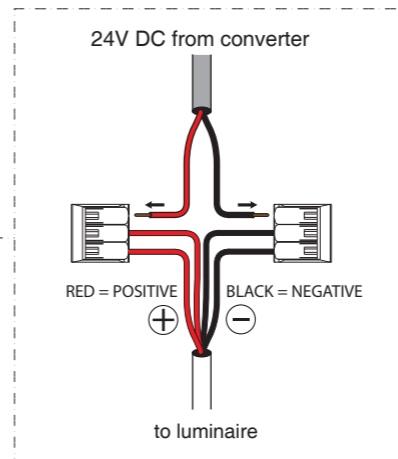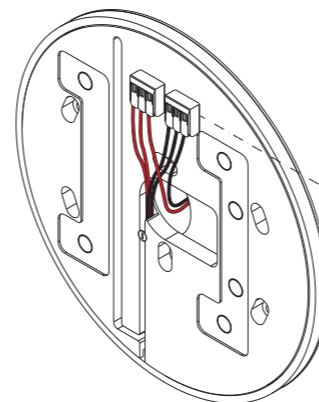


④ Hide the connectors in the baseframe connection slot

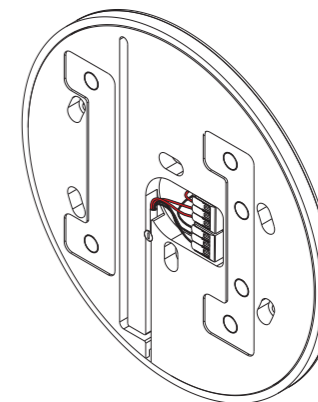


PLEASE MAKE SURE THAT THE CONNECTORS REMAIN BENEATH THE BASEFRAME SURFACE LEVEL WHILST MOUNTING THE COVER-PLATES IN THE FOLLOWING STEPS



④ Attach the left coverplate

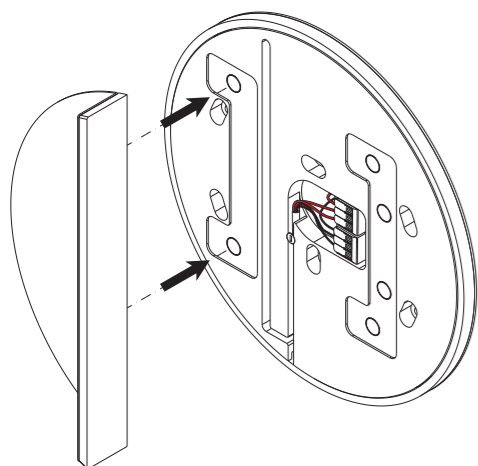


⑤ Attach the right coverplate

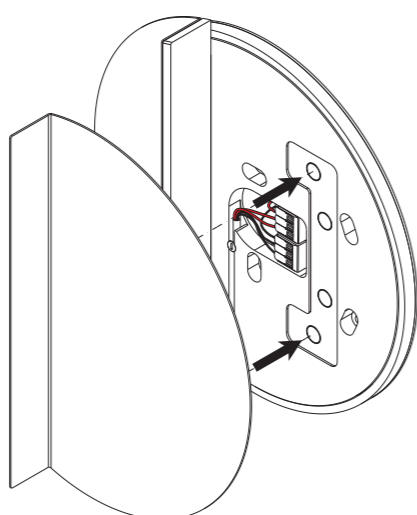

PLEASE MAKE SURE THE ORIENTATION PLATE WHICH IS MOUNTED ON THE COVERPLATE IS PROPERLY FIXED AND LOCATED IN THE PROVIDED BASEFRAME SLOT, PLEASE CHECK AFTER INSTALLING

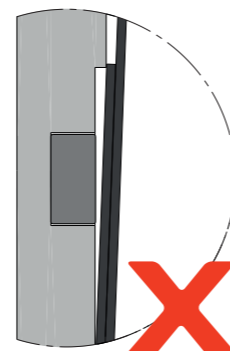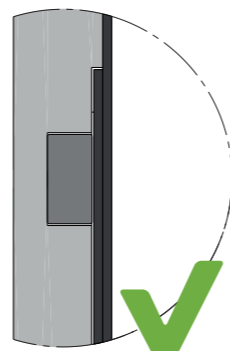

⑥ Switch on mains power supply

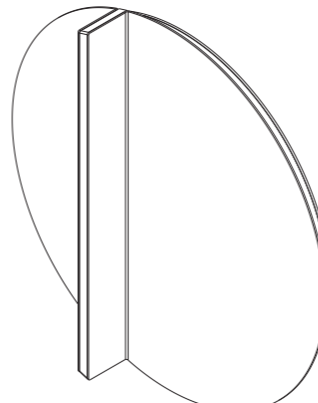

NL Installatie- en onderhoudsrichtlijnen m.b.t. de fabrieksgarantie.

1. De plaatsing, de aansluiting en het uittesten van dit toestel dient steeds te gebeuren door een erkend elektro-installateur.
2. Dit toestel moet geïnstalleerd, verbonden en getest worden volgens de nationaal geldende reglementen op elektrische installaties.
3. De technische bijsluiter dient te worden beschouwd als een onderdeel van de algemene verkoopvoorwaarden van TAL nv.
4. De elektro-installateur is verantwoordelijk voor het gebruik van compatibele voorschakelapparatuur die voldoen aan de geldende IEC normen.
5. Reinig het toestel enkel met een zachte en lichtvochtige doek zonder reinigingsmiddel.
6. Schakel altijd eerst de elektriciteit uit alvorens het toestel te plaatsen en te installeren.

EN Installation and maintenance instructions regarding the manufacturer's warranty.

1. Installation, connection and testing of this product must always be performed by a certified electrician.
2. This product must be installed, connected and tested in accordance with the applicable national regulations for electrical installations.
3. The technical manual must be regarded as part of the general sales conditions of TAL nv.
4. The electrical installer is responsible for the use of compatible control gear that meets the applicable IEC standards.
5. Only clean the device with a soft and slightly moist cloth without detergent.
6. Always switch off the electricity supply before installing and connecting the product.

DE Installations- und Wartungsanweisungen bezüglich der Herstellergarantie.

1. Installation, Anschluß und Prüfung dieses Geräts soll nur von einem anerkannten Elektriker ausgeführt werden.
2. Dieses Gerät soll in Übereinstimmung mit den nationalen geltenden Vorschriften für Elektroinstallationen installiert, angeschlossen und geprüft werden.
3. Die technische Anleitung muß als Teil der allgemeinen Verkaufsbedingungen von TAL nv betrachtet werden.
4. Der Elektroinstallateur ist verantwortlich für die Verwendung von kompatiblen Betriebsgeräten, die den geltenden IEC-Normen entsprechen.
5. Reinigen Sie das Gerät nur mit einem weichen und leicht feuchten Tuch ohne Reinigungsmittel.
6. Schalten Sie den Strom immer aus, bevor Sie das Gerät installieren und anschließen.

FR Instructions d'installation et d'entretien concernant la garantie du fabricant.

1. L'installation, la connexion et les essais de cet appareil doivent toujours être effectués par un électricien reconnu.
2. Cet appareil doit être installé, raccordé et testé conformément aux réglementations nationales pour les installations électriques.
3. La notice technique doit être considérée comme faisant partie des conditions générales de vente de TAL SA.
4. L'installateur électrique est responsable de l'utilisation d'un équipement de contrôle compatible qui satisfait aux normes CEI applicables.
5. Nettoyez l'appareil uniquement avec un chiffon doux et légèrement humide sans détergent.
6. Éteignez toujours l'électricité avant d'installer et de connecter l'appareil.