


Data Sheet

General and Commercial Data

Product Type	Interiors - Emergency lighting
Model	Stile+
Code	19502
Description	STILE+ LED 11W SE/SA RM 1/3H
EAN Code	8002219874801
Available Colors	Signal White RAL 9003
Application	Offices
Net Weight [kg]	0.25
Dimensions [mm]	119x280x46
Pieces per Pack	12

Technical Characteristics

Volume [m3]	0.002097
Insulation Class	II
IP Code	40
Impact Resistance IK Rating	7
Fire Resistance [°C]	850
Material	Polycarbonate
Emergency Source Supply Type	Self-contained luminaire
Emergency Operation Mode	Selectable
Battery	LiFe 3.2V 0.5Ah
Diagnosis System	Luminaire without diagnostic system
Test System for Emergency Lighting	Automatic without remote control
Visibility Distance (EN1838) [m]	21
Voltage [V]	230
Source Current [A]	0.06
Frequency [Hz]	50
Power Factor (cos(φ))	0.1
Luminaire Power [W]	0.8
Luminaire Flux in Emergency [lm]	120
Battery Life [h]	1
Source	CCT 4000 K - CRI 80
Photobiological Risk Index (EN 62471)	Risk 0

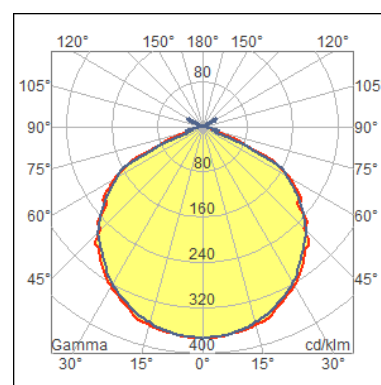

Marks



Photometric Parameters

Measurement	19502e1h
CIE Code	[57,89,98,100,100]

Notes

120/50
1/3
TR
110

Norms

CEI EN 60598-2-22