

Data Sheet


General and Commercial Data

Product Type	Exterior/Interior - Emergency Lighting
Model	Stile+
Code	19503
Description	STILE+ LED 18W SE/SA RM 1,5/3H
EAN Code	8002219874825
Available Colors	Signal White RAL 9003
Application	Offices
Net Weight [kg]	0.25
Dimensions [mm]	119x280x46
Pieces per Pack	12



Technical Characteristics

Volume [m3]	0.002181
Insulation Class	II
IP Code	40
Impact Resistance IK Rating	7
Fire Resistance [°C]	850
Material	Polycarbonate
Emergency Source Supply Type	Self-contained luminaire
Emergency Operation Mode	Selectable
Battery	LiFe 3.2V 1.5Ah
Diagnosis System	Luminaire without diagnostic system
Test System for Emergency Lighting	Automatic without remote control
Visibility Distance (EN1838) [m]	21
Voltage [V]	230
Source Current [A]	0.11
Frequency [Hz]	50
Power Factor (cos(fi))	0.1
Luminaire Power [W]	0.8
Luminaire Flux in Emergency [lm]	250
Battery Life [h]	1,5
Source	CCT 4000 K - CRI 80
Photobiological Risk Index (EN 62471)	Risk 0

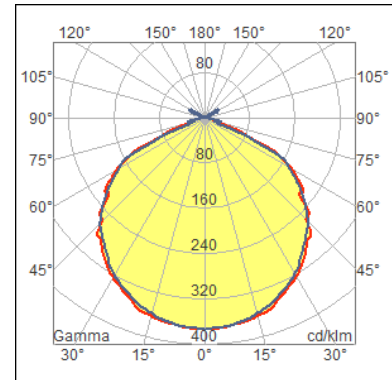

Marks



Photometric Parameters

Measurement	19503e1h5
CIE Code	[57,89,98,100,100]

Notes

250/150
1.5/3
TR
110

Norms

CEI EN 60598-2-22