




Watertight plates IP55 System range for rectangular (3 and 4 modules) flush mounting boxes. Watertight plates self-supporting for the installation of System range devices. Ergonomic membrane, opening facilitated by a comfortable handle. IP55 degree guaranteed with closed lid and watertight plate mounted on smooth and waterproof walls, without grooves.

| Categorie | System series | Type | Italiaanse standaard platen |
|-------------------------|------------------------|-------------------------------------|------------------------------------|
| Groep | Waterdichte platen | Omschrijving | 4 modules |
| Kleur plaat | Grijs RAL 7035 | Afwerking | Glimmend |
| Materiaal | Technopolymeer | IP waarde | IP55 (met gesloten deksel) |
| Deksel | Met membraan | Membraankleur | Transparant |
| Voor inbouw montagedoos | Rechthoekig 4 posities | Bevestiging | Met schroef (2 stuks) |
| Type schroef | 6/32 x 18mm | Schroefmateriaal | Gegalvaniseerd staal |
| Inbegrepen steun | Zelfondersteunend | Pakking | Geëxpandeerd gevulkaniseerd rubber |
| Gloeidraadtest | 650 °C | Thermodruk met kogel | 70 °C |
| Standaard | EN 60669-1 | Bedrijfstemperatuur | -25 +60 °C |
| UV-bestendigheid | Ja (ISO 4892-2) | Maximale openingshoek van de deksel | 100° |
| Electrocod | 0110 | | |

DIMENSIONAL

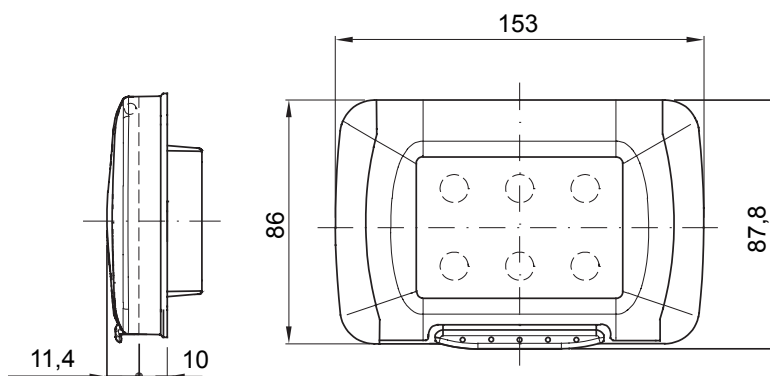

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

