


SylSafe XSpot OA R EM3 NM DA


Artikelnummer 0041776

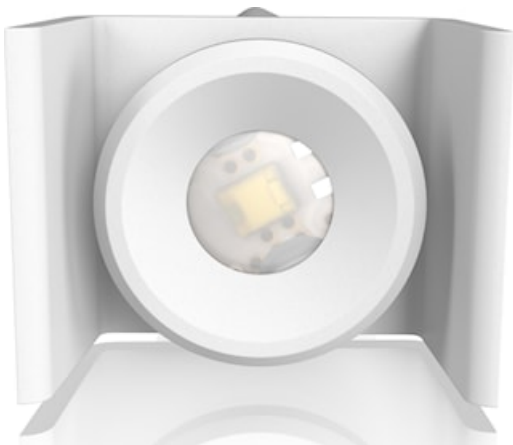

SylSafe XSpot OA R EM3 NM DA is a miniature emergency recessed spotlight with small form factor - cut-out diameter: 10mm. Non-maintained 3 hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. Quick and easy installation with driver module and battery pack contained in articulated case that can placed near the luminaire. Suitable for sheet metal installation. 80lm, 2.8W, IK03, IP20. Power Factor 0.45. Class II electrical construction.

Technische activa


Afmetingen (mm)

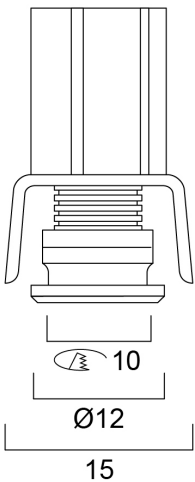

Fotometrie

0.5	1.51	E(0°) E(C0) 95.4°	118 10
1.0	3.01	E(0°) E(C0) 95.4°	30 2
1.5	4.52	E(0°) E(C0) 95.4°	13 1
2.0	6.02	E(0°) E(C0) 95.4°	7 1
2.5	7.53	E(0°) E(C0) 95.4°	5 0
3.0	9.03	E(0°) E(C0) 95.4°	3 0

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 112.5°)

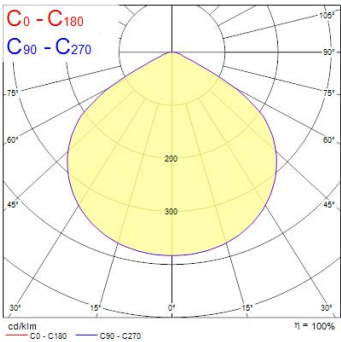

SylSafe XSpot OA R EM3 NM DA

Artikelnummer 0041776



General data

Productnaam	SylSafe XSpot OA R EM3 NM DA
Technologie	LED
Montage	Plafondinbouw
Algemene toepassing	Kantoor, Horeca, Retail, Onderwijs, Musea & Galeries
ETIM klasse	EC001957
Garantie	5 jaar

Physical data

Kleur behuizing	Wit
IP waarde	IP20
IK waarde	IK03
Lengte (mm)	12
Breedte (mm)	12
Hoogte (mm)	26.5
Gewicht (kg)	0.32

Optical data

Lumenstroom armatuur (lm)	80
Efficiëntie armatuur lm/W	29
Kleurtemperatuur (K)	5700
CRI (Ra)	70
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	80
Nood duur (u)	3

Packaging

EAN code	5410288417769
Enkele lengte verpakking (cm)	21.0
Enkele breedte verpakking (cm)	9.3
Hoogte eenheidsverpakking (cm)	4.7
DUN14 (inner)	15410288417766
Eenheden per omdoos	25
Lengte omdoos (cm)	42.4
Breedte omdoos (cm)	29.8
Diepte omdoos (cm)	28.0

Electrical data

Primaire voedingsspanning min	220
Primaire voedingsspanning max	240
Lamp arbeidsfactor	0.45
Elektrische beschermingsklasse	Klasse II
Voorschakelapparaat vereist	Ja
Stuurstroom driver (mA)	30
Nominale frequentie (Hz)	50/60Hz