

EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V

Artikelnummer 0046601




PRO



The DALI emergency pack enables conversion of general lighting for emergency operation. It provides benefits by enabling testing and monitoring of an emergency lighting system either on-site or via an internet connection. The product defaults to standalone AutoTest when not connected to a DALI network. The pack is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens light output, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output. DALI functionality. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Technische activa

Afmetingen (mm)

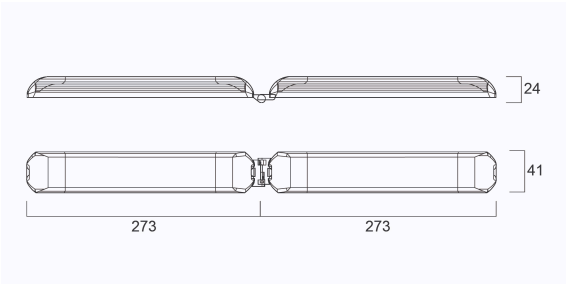

Fotometrie

EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V

Artikelnummer 0046601



General data

Productnaam	EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V
Technologie	Toebehoren
Algemene toepassing	Horeca, Musea & Galeries, Kantoor, Residentieel & Consument, Retail
ETIM klasse	EC000471
E-nummer FI	4278351
Garantie	1 jaar

Physical data

Gewicht (kg)	0.396
--------------	-------

Packaging

EAN code	5410288466019
Enkele lengte verpakking (cm)	28.5
Enkele breedte verpakking (cm)	9.4
Hoogte eenheidsverpakking (cm)	4.5
DUN14 (inner)	05410288466019
Eenheden per binnendoos	1
Eenheden per omdoos	25
Lengte omdoos (cm)	44.1
Breedte omdoos (cm)	30.5
Diepte omdoos (cm)	30.5

Safety data

Uitsluitend te gebruiken in droge toepassingen	Ja
--	----